



FDV SPEC SHEET

Ceto R


Art. no: 102791-36-3

NORLUX®


Lighting Solutions



Ø 160-170mm

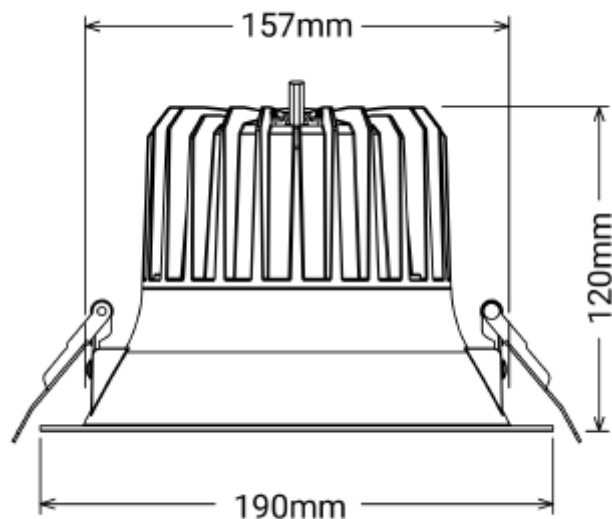

Ceto R



Art. no: 102791-36-3

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	1900
Lumen LED (tc=25):	2100
Beam Angle:	36°
CCT (Color Temperature):	3000
CRI / Ra:	90
Color Code:	930
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

MOUNTING / CONNECTION

Connection:	18i3 Quick connection
Cut-out [mm]:	160-175
Mounting:	Recessed



FDV SPEC SHEET

Ceto R

Art. no: 102791-36-3



PRODUCT		ELECTRICAL DATA	
To be recessed in insulation:	Not applicable	UGR (<=):	19
Ingress Protection:	IP44	Dimming:	Phase-Cut
Impact Protection:	IK06	Dimming Output Type:	PWM
Operating Temperature [°C]:	-20 - 45	Dimming Phasecut Type:	Leading / Trailing edge
Lifetime [h]:	L80B10: 100 000	Flickerfree:	Yes
Color:	White	Standby power Psb (W) <:	1
RAL:	RAL9016	Flicker metric (Pst LM) <:	1
Length [mm]:	190	Stroboscopic effect metric (SVM) <	0,4
Height [mm]:	120	System Power [W]:	18
Width [mm]:	190	System Voltage [V]:	230V 50Hz
Diameter [mm]:	190	Protection Class:	2
Weight [kg]:	0,7	Max load pr circuit - B16:	56
		Max load pr circuit - C10:	74
		Max load pr circuit - C16:	118
		Leakage current [mA]:	5
		Inrush current Imax [A]:	5
		Inrush current time [µs]:	100
		Socket / Cap-Base:	N/A
		Current Output [mA]:	500
		Voltage Forward Min [V]:	30
		Voltage Forward Max [V]:	40
		Emergency light [h]:	No Emergency light
		Emergency light testing:	N/A