




FDV SPEC SHEET

Cuna

Art. no: 102966-E-120-1

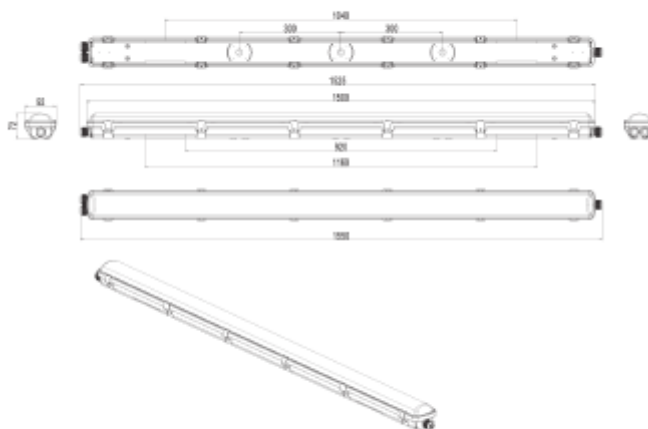

Cuna



Art. no: 102966-E-120-1

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 10400 |
| Lumen LED (tc=25): | 11400 |
| Beam Angle: | 120 |
| CCT (Color Temperature): | 30/35/4000K |
| CRI / Ra: | 80 |
| Color Code: | 830/835/840 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | PMMA Prismatic |
| UGR (<=): | 25 |



FDV SPEC SHEET

Cuna

Art. no: 102966-E-120-1



| PRODUCT | | ELECTRICAL DATA | |
|-----------------------------|-----------------|------------------------------------|-------------|
| Ingress Protection: | IP66 | Dimming: | None |
| Impact Protection: | IK03 | Flickerfree: | Yes |
| Operating Temperature [°C]: | -20 - 40 | Standby power Psb (W) <: | 0,5 |
| Lifetime [h]: | L80B10: 100 000 | Flicker metric (Pst LM) <: | 1 |
| Color: | Light Grey | Stroboscopic effect metric (SVM) < | 0,4 |
| Length [mm]: | 1550 | System Power [W]: | 65/55/46/37 |
| Height [mm]: | 72 | Preset Power [W]: | 65 |
| Width [mm]: | 92 | System Voltage [V]: | 230V 50Hz |
| Weight [kg]: | 2,9 | Protection Class: | 1 |
| | | Max load pr circuit - B10: | 22 |
| | | Max load pr circuit - B16: | 36 |
| | | Max load pr circuit - C10: | 36 |
| | | Max load pr circuit - C16: | 60 |
| | | Inrush current Imax [A]: | 25 |
| | | Inrush current time [µs]: | 135 |
| | | Socket / Cap-Base: | N/A |
| | | Current Output [mA]: | 70 |
| | | Emergency light [h]: | 3 hours |
| | | Emergency light testing: | Selftest |
| | | Emergency lumen out [lm]: | 300 |
| MOUNTING / CONNECTION | | | |
| Connection: | | Terminal | |
| Through-wiring (mm2): | | 5x2,5 | |
| Mounting: | | Suspended, Ceiling, Surface, Wall | |