



PRODUCT SHEET


Proofsafe I

Art. no: 102972-120-3

NORLUX®


Lighting Solutions

Proofsafe I

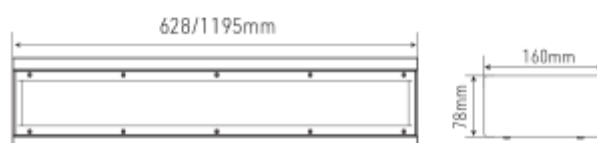

SPECIFICATIONS

Lightsource Type:	LED (replaceable)
System Power [W]:	36/30/25/21W
Preset Power [W]:	36W
CCT (Color Temperature):	3000K
CRI / Ra:	80
Lumen Output:	4710lm
Lumen LED (tc=25):	4700lm
Beam Angle:	105°
Lens (Diffuser):	Opal
Dimming:	None
Flickerfree:	Yes
System Voltage [V]:	230V 50Hz
Connection:	Quickconnectx2
Mounting:	Ceiling, Surface, Wall
Lifetime [h]:	L80B10: 100 000h
Lumen/W:	120lm/W
UGR (<=):	25
MacAdam (SDCM):	3
Color:	White
Length [mm]:	1195mm
Height [mm]:	78mm
Width [mm]:	160mm
Weight [kg]:	7,25kg

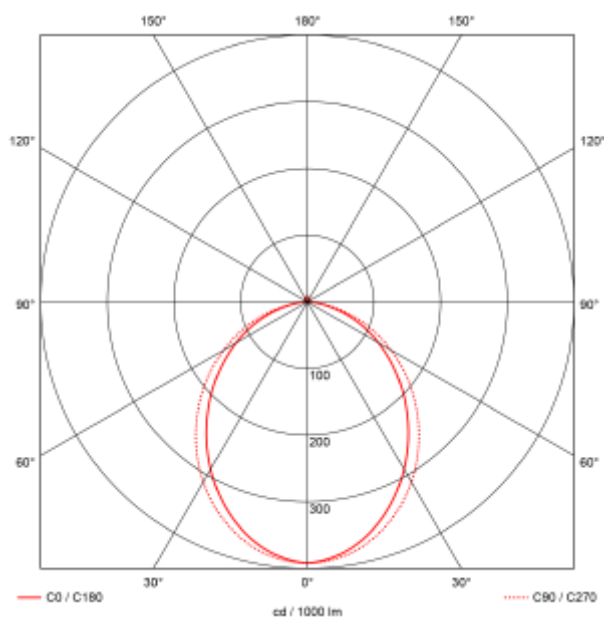

Proofsafe is specially designed for environments where security and vandal protection are essential. With its unique design and customized screws, this luminaire is ideal for use in prisons and other facilities that require robust protection against vandalism