



PRODUCT SHEET


Montana S

Art. no: 103031-40-GS-1

NORLUX®

Lighting Solutions

Montana S

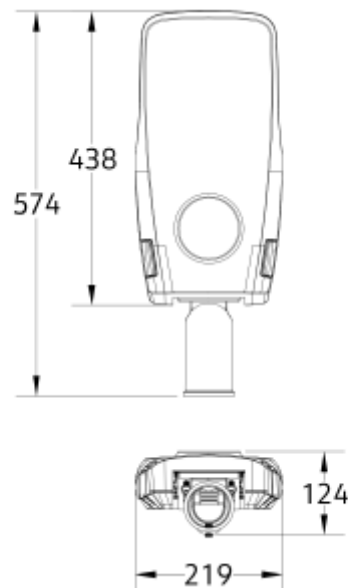

SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	40W
CCT (Color Temperature):	3000K/4000K
CRI / Ra:	70
Lumen Output:	6000lm
Lumen LED (tc=25):	6600lm
Beam Angle:	156°*54°
Lens (Diffuser):	PMMA
Dimming:	None
Flickerfree:	Yes
System Voltage [V]:	230V 50Hz
Connection:	Cable 8m
Mounting:	Mast Ø60-76
Cut-out [mm]:	n/amm
Lifetime [h]:	L80B10: 100 000h
Lumen/W:	150lm/W
MacAdam (SDCM):	5
Color:	Grey
Length [mm]:	574mm
Height [mm]:	124mm
Width [mm]:	219mm
Diameter [mm]:	76mm
Weight [kg]:	5,2kg
Emergency light [h]:	No Emergency light
Emergency light testing:	N/A

Montana feature an innovative, tool-free system that allows for easy replacement of the electrical compartment directly on-site. This ensures fast and efficient maintenance while significantly reducing labor costs and downtime. The sleek and aerodynamic design minimizes wind resistance, enhances reliability, and optimizes heat dissipation, resulting in an extended lifespan. Built to withstand challenging conditions such as Nordic roads and high-altitude environments, Montana deliver dependable performance even in extreme settings.