




## FDV SPEC SHEET

Uniplus Interior

Art. no: 103050-90-3

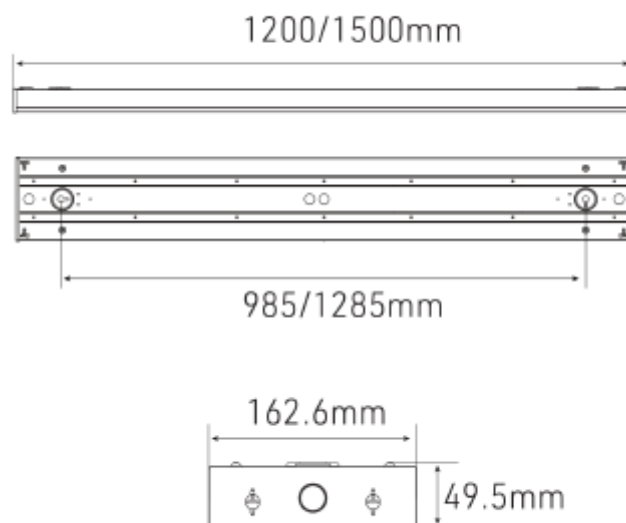

# Uniplus Interior



Art. no: 103050-90-3

### LIGHT TECHNICAL

|                          |                   |
|--------------------------|-------------------|
| Lightsource Type:        | LED (replaceable) |
| Lumen Output:            | 4500              |
| Lumen LED (tc=25):       | 5000              |
| Beam Angle:              | 90°               |
| CCT (Color Temperature): | 3000              |
| CRI / Ra:                | 80                |
| Color Code:              | 830               |
| MacAdam (SDCM):          | 3                 |
| Lens (Diffuser):         | Micropris.        |
| UGR (<=):                | 19                |

### MOUNTING / CONNECTION

|                       |                             |
|-----------------------|-----------------------------|
| Connection:           | Quickconnectx2              |
| Through-wiring (mm2): | 5x2,5                       |
| Mounting:             | Suspended, Ceiling, Surface |

### ELECTRICAL DATA

|                                    |             |
|------------------------------------|-------------|
| Dimming:                           | None        |
| Flickerfree:                       | Yes         |
| Flicker metric (Pst LM) <:         | 1           |
| Stroboscopic effect metric (SVM) < | 0,4         |
| System Power [W]:                  | 18/22/27/31 |
| System Voltage [V]:                | 230V 50Hz   |
| Protection Class:                  | 1           |
| Max load pr circuit - B10:         | 33          |
| Max load pr circuit - B16:         | 54          |
| Max load pr circuit - C10:         | 56          |
| Max load pr circuit - C16:         | 90          |
| Leakage current [mA]:              | 0,7         |
| Inrush current time [µs]:          | 170         |
| Socket / Cap-Base:                 | N/A         |
| Current Output [mA]:               | 22mA        |



## FDV SPEC SHEET

Uniplus Interior

Art. no: 103050-90-3



| PRODUCT                     |                 |
|-----------------------------|-----------------|
| Ingress Protection:         | IP40            |
| Impact Protection:          | IK06            |
| Operating Temperature [°C]: | -20 - 40        |
| Lifetime [h]:               | L80B10: 100 000 |
| Color:                      | White           |
| RAL:                        | RAL9003         |
| Length [mm]:                | 1200            |
| Height [mm]:                | 49,5            |
| Width [mm]:                 | 162,6           |
| Weight [kg]:                | 2,8             |
| Housing Material :          | Metal           |