



## PRODUCT SHEET


Uniplus Interior

Art. no: 103052-90-3-ddd

# NORLUX®


Lighting Solutions

## Uniplus Interior

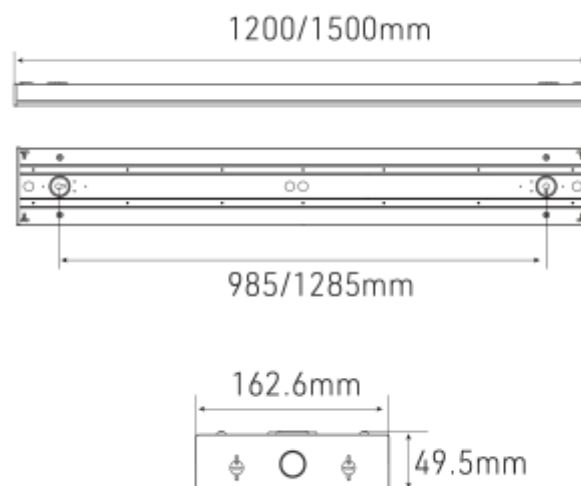

### SPECIFICATIONS

|                          |                             |
|--------------------------|-----------------------------|
| Lightsource Type:        | LED (replaceable)           |
| System Power [W]:        | 34WW                        |
| CCT (Color Temperature): | 3000K                       |
| CRI / Ra:                | 80                          |
| Lumen Output:            | 4590lm                      |
| Lumen LED (tc=25):       | 5200lm                      |
| Beam Angle:              | 90°                         |
| Lens (Diffuser):         | Micropris.                  |
| Dimming:                 | DALI2                       |
| Flickerfree:             | Yes                         |
| System Voltage [V]:      | 230V 50Hz                   |
| Connection:              | Terminalx2                  |
| Mounting:                | Suspended, Ceiling, Surface |
| Lifetime [h]:            | L80B10: 100 000h            |
| Lumen/W:                 | 135lm/W                     |
| UGR (<=):                | 19                          |
| MacAdam (SDCM):          | 3                           |
| Through-wiring (mm2):    | 5x2,5                       |
| Color:                   | White                       |
| Length [mm]:             | 1500mm                      |
| Height [mm]:             | 49,5mm                      |
| Width [mm]:              | 162,6mm                     |
| Weight [kg]:             | 3,4kg                       |

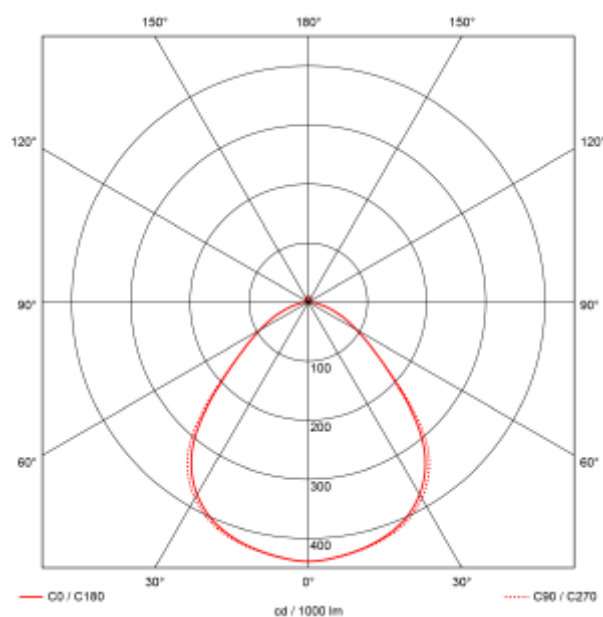

Uniplus is a surface mounted luminaire with the latest technology and optics to ensure a high luminous efficiency and low glare.

-Low glare UGR19 -Up to 150lm/w -Easy and fast installation.

-Suspended installation (accessory) DALI2 driver