





## FDV SPEC SHEET

Flute

Art. no: 103280-2-ddd

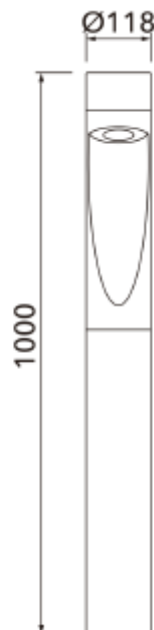

# Flute



Art. no: 103280-2-ddd

### LIGHT TECHNICAL

Lightsource Type:	LED (replaceable)
Lumen Output:	1025
Lumen LED (tc=25):	1100
Beam Angle:	50°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
Lens (Diffuser):	Frosted

### MOUNTING / CONNECTION

Connection:	Cable 1.5m
Mounting:	Bollard



## FDV SPEC SHEET

Flute

Art. no: 103280-2-ddd



PRODUCT	
Ingress Protection:	IP65
Impact Protection:	IK08
Corrosion Class:	C4
Wind force (EPA) [m2] at 0°:	0,118
Operating Temperature [°C]:	-25 - 45
Color:	Black
RAL:	RAL9005
Length [mm]:	118
Height [mm]:	1000
Width [mm]:	118
Diameter [mm]:	118
Weight [kg]:	4,7

ELECTRICAL DATA	
Dimming:	DALI
Dimming Output Type:	PWM
Output Hz:	4000
Standby power Psb (W) <:	0,5
Flicker metric (Pst LM) <:	1
Stroboscopic effect metric (SVM) <	0,4
System Power [W]:	15
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	36
Max load pr circuit - B16:	60
Max load pr circuit - C10:	60
Max load pr circuit - C16:	100
Leakage current [mA]:	0,5
Inrush current Imax [A]:	26
Inrush current time [µs]:	50
Socket / Cap-Base:	N/A
Current Output [mA]:	450
Voltage Forward Min [V]:	5,8
Voltage Forward Max [V]:	6,6