



PRODUCT SHEET


Silindir 70

Art. no: 1081-7-40-2-ddd

NORLUX®

Lighting Solutions


Silindir 70

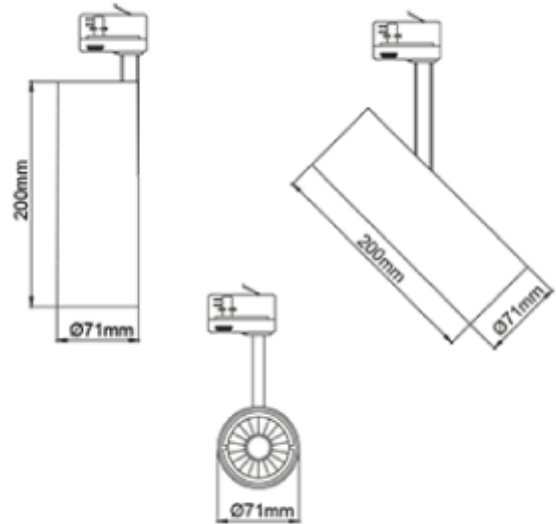

A+

SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	20W
CCT (Color Temperature):	3000K
CRI / Ra:	90
Lumen Output:	2400lm
Lumen LED (tc=25):	2500lm
Beam Angle:	40°
Lens (Diffuser):	Clear
Dimming:	DALI2
Flickerfree:	Yes
System Voltage [V]:	230V 50Hz
Connection:	Track 3-Circuit+dim
Mounting:	Track, Ceiling
Lifetime [h]:	L80B10: 100 000h
Lumen/W:	120lm/W
MacAdam (SDCM):	3
Color:	Black
Length [mm]:	71mm
Height [mm]:	215mm
Width [mm]:	71mm
Weight [kg]:	1kg

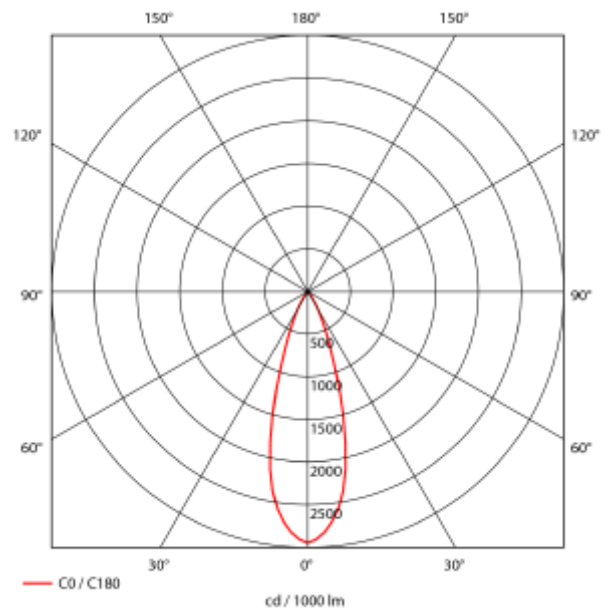

The Silindir uses the possibilities created by new technology. The LED driver is mounted inside the luminaire body. This gives us a slim design combined with a powerful light output that can be easily adjusted in all directions to meet all needs. Cylinder can be tilted 90 degrees and rotated 350 degrees its own axis.