



## FDV SPEC SHEET


Cold 5

Art. no: 1107-30-2

# NORLUX®

Lighting Solutions

130x36mm

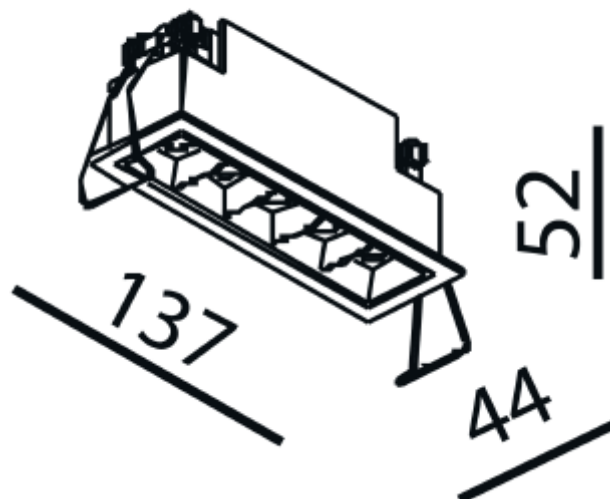

## Cold 5



A++

Art. no: 1107-30-2

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	902
Lumen LED (tc=25):	1150
Beam Angle:	30°
CCT (Color Temperature):	3000
CRI / Ra:	90
Color Code:	930
MacAdam (SDCM):	2
Lens (Diffuser):	None

### MOUNTING / CONNECTION

Connection:	Depending on driver
Cut-out [mm]:	130x36
Mounting:	Recessed, Ceiling

### ELECTRICAL DATA

UGR (<=):	13
Dimming:	Depending on Driver
Flickerfree:	Yes
System Power [W]:	10
System Voltage [V]:	230V 50Hz
Protection Class:	3
Socket / Cap-Base:	N/A
Current Output [mA]:	700
Voltage Forward Max [V]:	15



**FDV SPEC SHEET**

Cold 5  
Art. no: 1107-30-2



PRODUCT	
To be recessed in insulation:	No
Ingress Protection:	IP20
Lifetime [h]:	L80B10: 100 000
Color:	Black
Length [mm]:	137
Height [mm]:	52
Width [mm]:	44
Weight [kg]:	0,32
Housing Material :	Aluminium
Material 2:	Mechanical installed part (Steel)