



PRODUCT SHEET

Cold 10

Art. no: 1111-30-2


NORLUX®

Lighting Solutions

Cold 10




250x36mm

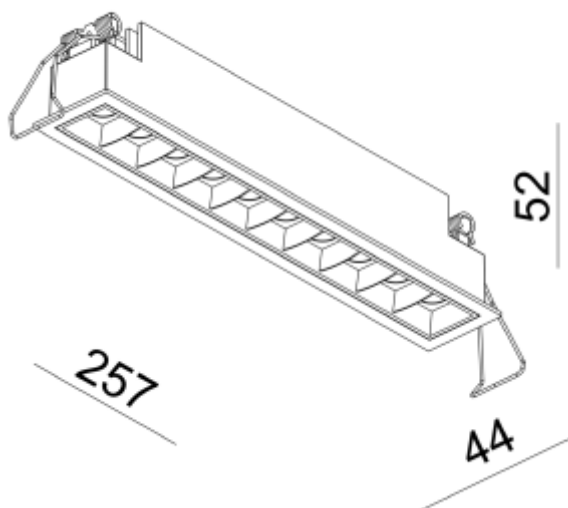

SPECIFICATIONS

| | |
|-------------------------------|---------------------|
| Lightsource Type: | LED (built in) |
| System Power [W]: | 2x10W |
| CCT (Color Temperature): | 3000K |
| CRI / Ra: | 90 |
| Lumen Output: | 1790lm |
| Lumen LED (tc=25): | 2200lm |
| Beam Angle: | 30° |
| Lens (Diffuser): | None |
| Dimming: | Depending on Driver |
| Flickerfree: | Yes |
| System Voltage [V]: | 230V 50Hz |
| Connection: | Depending on driver |
| Mounting: | Recessed, Ceiling |
| Cut-out [mm]: | 250x36mm |
| Lifetime [h]: | L80B10: 100 000h |
| Lumen/W: | 86lm/W |
| UGR (<=): | 13 |
| MacAdam (SDCM): | 3 |
| Color: | Black |
| Length [mm]: | 257mm |
| Height [mm]: | 52mm |
| Width [mm]: | 44mm |
| Weight [kg]: | 0,7kg |
| To be recessed in insulation: | No |

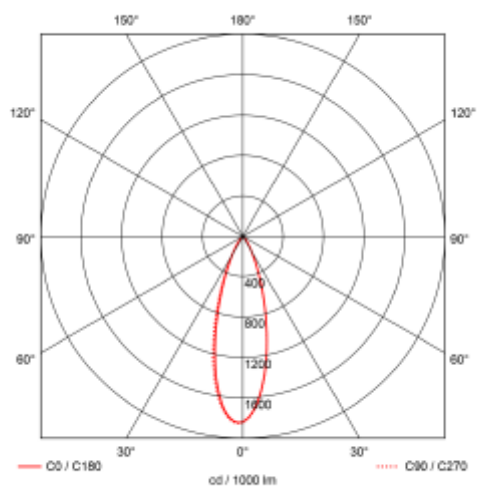

Med sin rektangulære form og inntrukket lyskilde har Cold downlight et unikt dekorativt design som egner seg i de fleste rom. Frontring leveres i flere farger og byttes enkelt ut. Driver medfølger ikke, se tilbehør for alternativ farge på front ring. DALI2: IE25D-03 Driver 350-700mA cc 25W DALI2 EPN0034 & 18i5DALI DALI2: 0300-17 Driver DALI 700mA max 35W 25-50V (one4all) 18i5 DALI/EPN0034 Fasekutt: D70030NTF-02 Driver 700mA cc 30W (21-43V) Phasecut JB&e