



## PRODUCT SHEET

Cold 10

Art. no: 1111-30-32


# NORLUX®

Lighting Solutions

## Cold 10



250x36mm

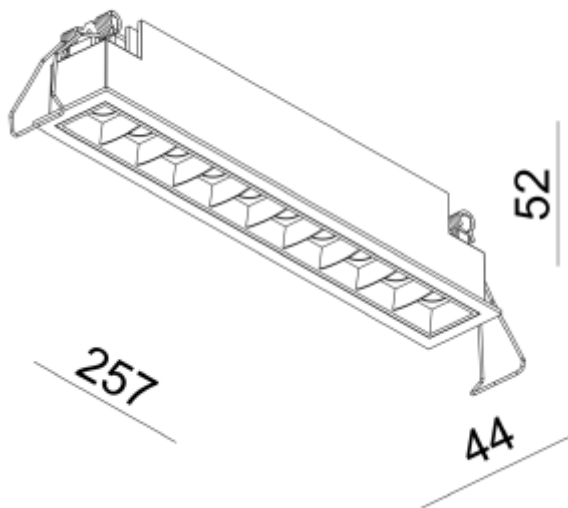

A++ - A

| SPECIFICATIONS                |                     |
|-------------------------------|---------------------|
| Lightsource Type:             | LED (built in)      |
| System Power [W]:             | 2x10W               |
| CCT (Color Temperature):      | 3000K               |
| CRI / Ra:                     | 90                  |
| Lumen Output:                 | 2150lm              |
| Lumen LED (tc=25):            | 2100lm              |
| Beam Angle:                   | 30°                 |
| Lens (Diffuser):              | None                |
| Dimming:                      | Depending on Driver |
| Flickerfree:                  | Yes                 |
| System Voltage [V]:           | 230V 50Hz           |
| Connection:                   | Depending on driver |
| Mounting:                     | Recessed, Ceiling   |
| Cut-out [mm]:                 | 250x36mm            |
| Lifetime [h]:                 | L80B10: 100 000h    |
| Lumen/W:                      | 97lm/W              |
| Color:                        | White / Black       |
| Length [mm]:                  | 257mm               |
| Height [mm]:                  | 52mm                |
| Width [mm]:                   | 44mm                |
| Weight [kg]:                  | 0,7kg               |
| To be recessed in insulation: | No                  |

Med sin rektangulære form og inntrukket lyskilde har Cold downlight et unikt dekorativt design som egner seg i de fleste rom. Frontring leveres i flere farger og byttes enkelt ut. Driver medfølger ikke, se tilbehør for alternativ farge på front ring. DALI2: IE25D-03 Driver 350-700mA cc 25W DALI2 EPN0034 & 18i5DALI DALI2: 0300-17 Driver DALI 700mA max 35W 25-50V (one4all) 18i5 DALI/EPN0034 Fasekutt: D70030NTF-02 Driver 700mA cc 30W (21-43V) Phasecut JB&