



PRODUCT SHEET


Cold 10 Mini

Art. no: 1111-50-2

NORLUX®


Lighting Solutions

Cold 10 Mini

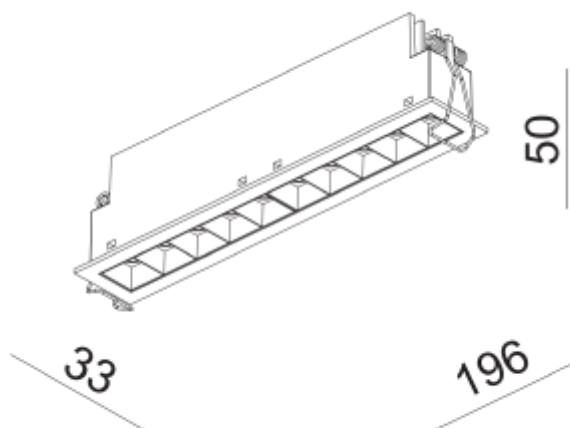

SPECIFICATIONS

| | |
|--------------------------|-------------------|
| Lightsource Type: | LED (built in) |
| System Power [W]: | 21W |
| CCT (Color Temperature): | 3000K |
| CRI / Ra: | 90 |
| Lumen Output: | 1170lm |
| Lumen LED (tc=25): | 2000lm |
| Beam Angle: | 50° |
| Lens (Diffuser): | N/A |
| Dimming: | Phase-Cut |
| Flickerfree: | No |
| System Voltage [V]: | 230V 50Hz |
| Connection: | EPN0024 |
| Mounting: | Recessed, Ceiling |
| Cut-out [mm]: | 189*27mm |
| Lifetime [h]: | L80B10: 100 000h |
| Lumen/W: | 58lm/W |
| UGR (<=): | 9 |
| Color: | Black |
| Length [mm]: | 196mm |
| Height [mm]: | 50mm |
| Width [mm]: | 33mm |
| Weight [kg]: | 0,54kg |

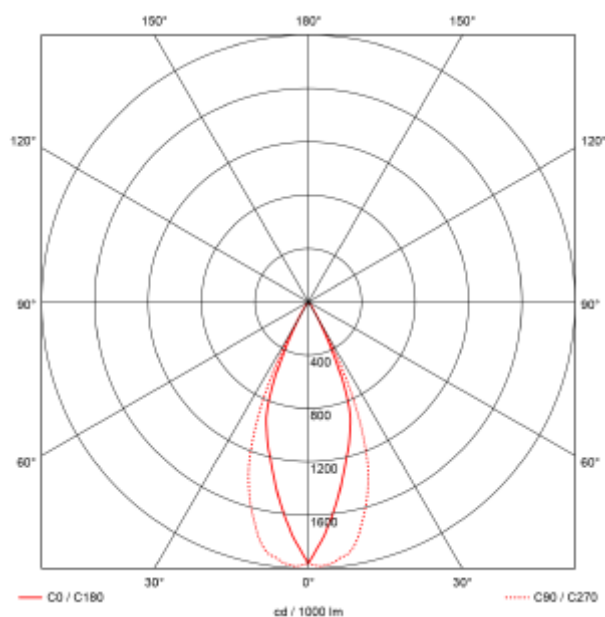

Cold 10 Mini is an elegant recessed downlight, perfect for a variety of applications, including cafes, cabins, general rooms, hotels, homes, and shops. With a cut-out size of 189x27mm and phase-cut dimming, this downlight offers exceptional flexibility. With an IP20 rating and protection class 2, as well as a lifespan of L80B10: 100,000 hours, Cold 10 Mini ensures long-lasting and reliable performance. Its black RAL9003 finish and slim design make it a stylish addition to any interior.