



## PRODUCT SHEET


Cold 5 Surface

Art. no: 1121-30-2

# NORLUX®

Lighting Solutions

## Cold 5 Surface

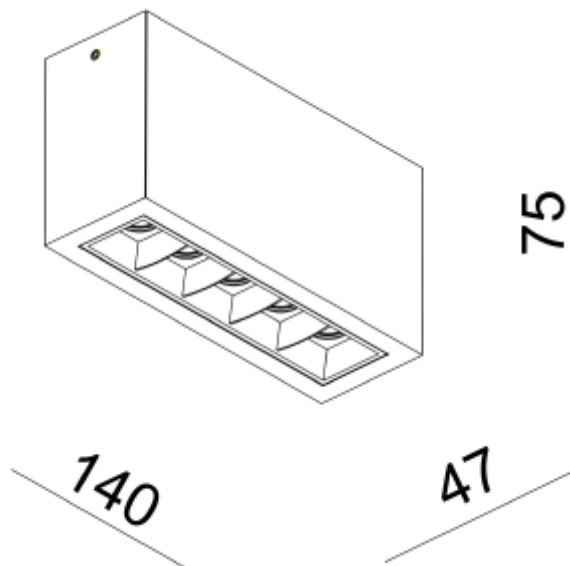

With its rectangular and recessed light source, Cold surface downlight has a unique design that is suitable for most rooms. Front ring is available in several different colors and can easily be replaced.

### SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	5x2W
CCT (Color Temperature):	2700K
CRI / Ra:	90
Lumen Output:	860lm
Lumen LED (tc=25):	1150lm
Beam Angle:	30°
Lens (Diffuser):	None
Dimming:	Phase-Cut
System Voltage [V]:	230V 50Hz
Connection:	Terminal
Mounting:	Ceiling, Surface
Lifetime [h]:	L80B10: 100 000h
Lumen/W:	81lm/W
UGR (<=):	13
MacAdam (SDCM):	2
Color:	Black
Length [mm]:	140mm
Height [mm]:	75mm
Width [mm]:	47mm
To be recessed in insulation:	No