




FDV SPEC SHEET

Leila Maxi

Art. no: 15076-01-2-ddd



210mm

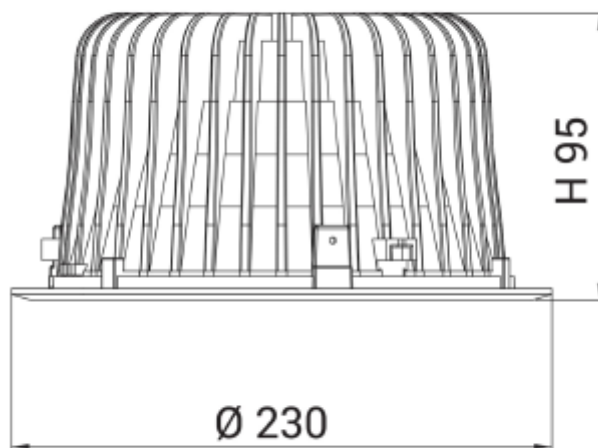

Leila Maxi



Art. no: 15076-01-2-ddd

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen LED (tc=25): | 2950 |
| CCT (Color Temperature): | 3000 |
| CRI / Ra: | 90 |
| Color Code: | 930 |
| Lens (Diffuser): | Opal |

MOUNTING / CONNECTION

| | |
|---------------|----------------------------|
| Connection: | 18i5 DALI Quick connection |
| Cut-out [mm]: | Ø210 |
| Mounting: | Recessed, Ceiling |

PRODUCT

| | |
|-------------------------------|----------------|
| To be recessed in insulation: | No |
| Ingress Protection: | IP20 |
| Lifetime [h]: | L80B10: 50.000 |
| Color: | Black |
| Height [mm]: | 100 |
| Width [mm]: | 230 |
| Weight [kg]: | 1,6 |

ELECTRICAL DATA

| | |
|------------------------------------|----------------------|
| UGR (<=): | 23 |
| Dimming: | DALI2 |
| Dimming Output Type: | Amplitude Modulation |
| Standby power Psb (W) <: | 0,15 |
| Flicker metric (Pst LM) <: | 1 |
| Stroboscopic effect metric (SVM) < | 0,4 |
| System Power [W]: | 33 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 2 |
| Max load pr circuit - B10: | 14 |
| Max load pr circuit - B16: | 23 |
| Max load pr circuit - C10: | 23 |
| Max load pr circuit - C16: | 38 |
| Leakage current [mA]: | 0,16 |
| Inrush current Imax [A]: | 23 |
| Inrush current time [µs]: | 200 |
| Current Output [mA]: | 900 |