




FDV SPEC SHEET

Trimo

Art. no: 18045-6-30-2



155mm

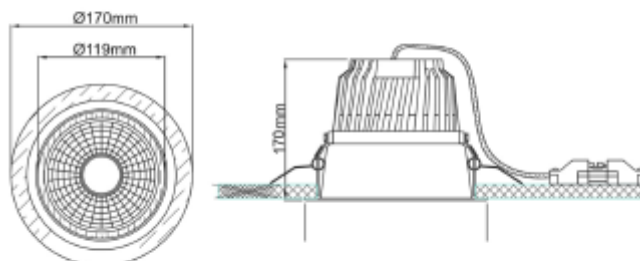

Trimo



Art. no: 18045-6-30-2

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	3816
Lumen LED (tc=25):	4450
Beam Angle:	30°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

MOUNTING / CONNECTION

Connection:	18i3 Quick connection
Cut-out [mm]:	Ø155
Mounting:	Recessed, Ceiling

ELECTRICAL DATA

UGR (<=):	13
Dimming:	None
System Power [W]:	31
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	14
Max load pr circuit - B16:	24
Max load pr circuit - C10:	24
Max load pr circuit - C16:	40
Inrush current I _{max} [A]:	25
Inrush current time [μs]:	150
Socket / Cap-Base:	N/A
Current Output [mA]:	800
Voltage Forward Min [V]:	30,6
Voltage Forward Max [V]:	39,2



FDV SPEC SHEET

Trimo

Art. no: 18045-6-30-2



PRODUCT

To be recessed in insulation:	No
Ingress Protection:	IP20
Lifetime [h]:	L80B10: 60 000
Color:	Black
Length [mm]:	170
Height [mm]:	170
Width [mm]:	170
Weight [kg]:	1,4