



PRODUCT SHEET

Acrux Adjustable


Art. no: 2102-36-2

NORLUX®

Lighting Solutions

Acrux Adjustable


82-88mm

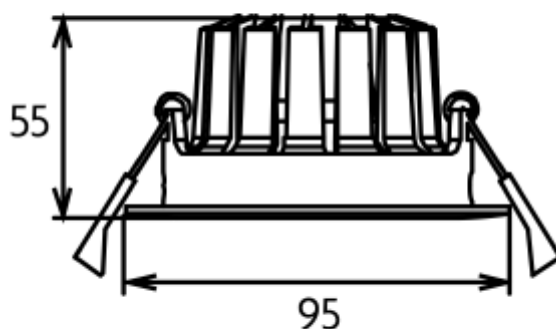

A++ - A

SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	10W
CCT (Color Temperature):	2700K
CRI / Ra:	90
Lumen Output:	654lm
Lumen LED (tc=25):	650lm
Beam Angle:	36°
Lens (Diffuser):	Clear
Dimming:	Phase-Cut
System Voltage [V]:	230V 50Hz
Connection:	QuickConnect
Mounting:	Recessed, Ceiling
Cut-out [mm]:	Ø82-Ø88mm
Lifetime [h]:	L80B10: 100 000h
Lumen/W:	61lm/W
MacAdam (SDCM):	3
Color:	Black
Height [mm]:	55mm
Width [mm]:	95mm
To be recessed in insulation:	No

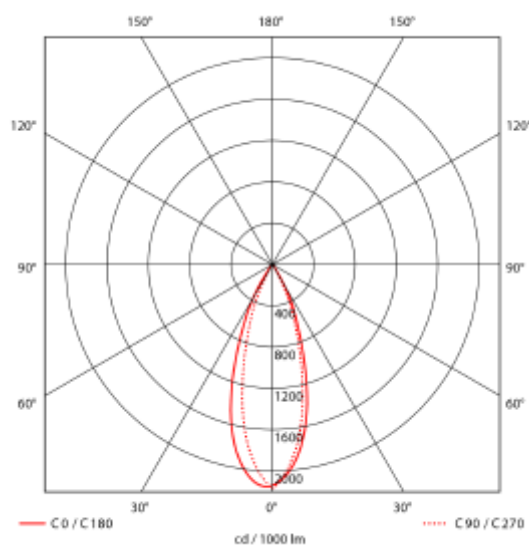

Adjustable downlight with IP54 classification. Low glare and secluded light source and with modern reflector. Suitable for all rooms included bathroom. Complete with dimmable driver and quick connect for easy installation.