



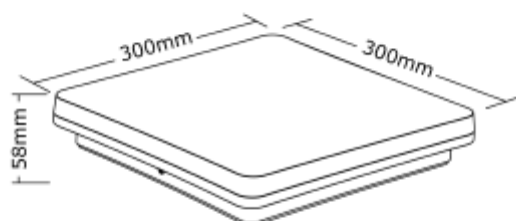

FDV SPEC SHEET

Pollux Square

Art. no: 2115-120-3

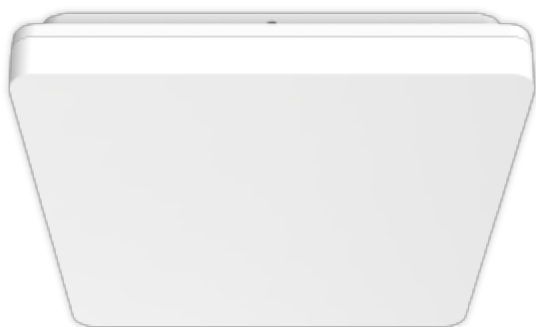

Pollux Square



Art. no: 2115-120-3

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 1784 (4000K) |
| Lumen LED (tc=25): | 2000 |
| Beam Angle: | 120 |
| CCT (Color Temperature): | 3/4/5700 |
| CRI / Ra: | 80 |
| Color Code: | 830/840/857 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | Opal |

MOUNTING / CONNECTION

| | |
|-------------|------------------|
| Connection: | QuickConnect |
| Mounting: | Ceiling, Surface |

ELECTRICAL DATA

| | |
|------------------------------------|-----------|
| Dimming: | None |
| Standby power Psb (W) <: | 0,5 |
| Flicker metric (Pst LM) <: | 1 |
| Stroboscopic effect metric (SVM) < | 0,4 |
| System Power [W]: | 18 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 2 |
| Max load pr circuit - B10: | 37 |
| Max load pr circuit - B16: | 59 |
| Max load pr circuit - C10: | 37 |
| Max load pr circuit - C16: | 59 |
| Leakage current [mA]: | 0,75 |
| Inrush current Imax [A]: | 19,6 |
| Inrush current time [µs]: | 12 |
| Socket / Cap-Base: | N/A |



FDV SPEC SHEET

Pollux Square

Art. no: 2115-120-3



PRODUCT

| | |
|---------------------|----------------|
| Ingress Protection: | IP54 |
| Impact Protection: | IK10 |
| Lifetime [h]: | L80B50: 50 000 |
| Color: | White |
| Length [mm]: | 300 |
| Height [mm]: | 58 |
| Width [mm]: | 300 |