



PRODUCT SHEET

Acrux Adjustable


Art. no: 2302-36-3

NORLUX®

Lighting Solutions


Acrux Adjustable

82-88mm

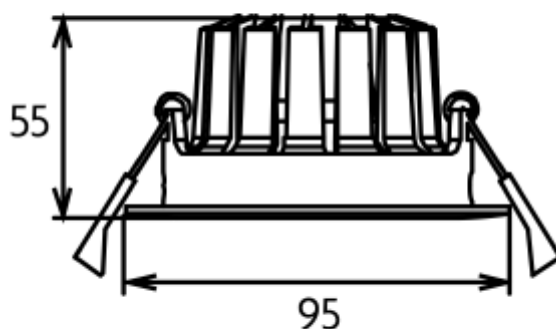

SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	10W
CCT (Color Temperature):	3000K
CRI / Ra:	90
Lumen Output:	790lm
Lumen LED (tc=25):	850lm
Beam Angle:	36°
Lens (Diffuser):	Clear
Dimming:	Phase-Cut
System Voltage [V]:	230V 50Hz
Connection:	QuickConnect
Mounting:	Recessed, Ceiling
Cut-out [mm]:	Ø82-Ø88mm
Lifetime [h]:	L80B10: 100 000h
Lumen/W:	79lm/W
MacAdam (SDCM):	3
Color:	White
Height [mm]:	55mm
Width [mm]:	95mm
Weight [kg]:	0,4kg
To be recessed in insulation:	No

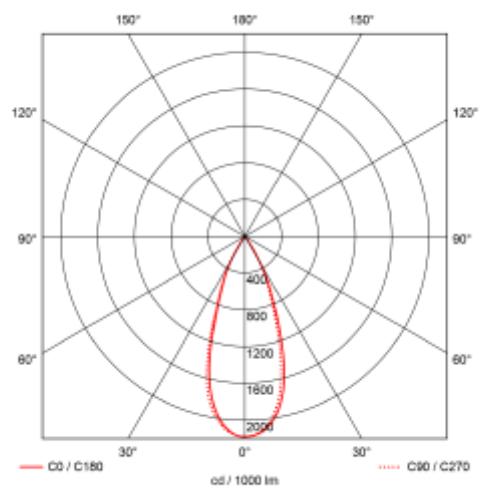

Adjustable downlight with IP54 classification. Low glare and secluded light source and with modern reflector. Suitable for all rooms included bathroom. Complete with dimmable driver and quick connect for easy installation.