



PRODUCT SHEET

Tigrus Tilttable

Art. no: 24930-36-2


NORLUX®

Lighting Solutions

Tigrus Tilttable




76-83mm

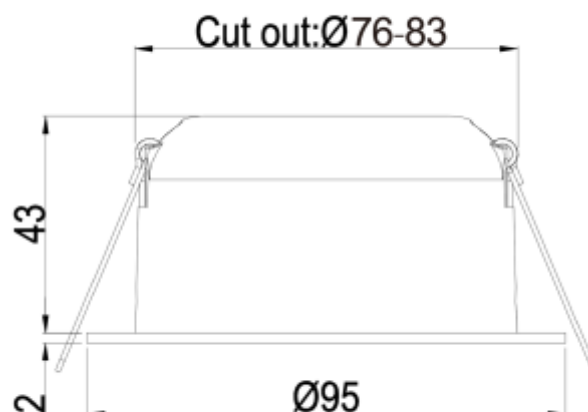

A+

SPECIFICATIONS

| | |
|-------------------------------|-----------------------------|
| System Power [W]: | 7W |
| CCT (Color Temperature): | 3000K |
| CRI / Ra: | 95 |
| Lumen Output: | 530lm |
| Lumen LED (tc=25): | 550lm |
| Beam Angle: | 36° |
| Lens (Diffuser): | Clear |
| Dimming: | Phase-Cut |
| Flickerfree: | Yes |
| System Voltage [V]: | 230V 50Hz |
| Connection: | QuickConnect |
| Mounting: | Recessed, Ceiling |
| Cut-out [mm]: | Ø76-Ø83mm |
| Lifetime [h]: | L80B10: 100 000h |
| Lumen/W: | 80lm/W |
| MacAdam (SDCM): | 3 |
| Color: | Black |
| Height [mm]: | 45mm |
| Width [mm]: | 95mm |
| Diameter [mm]: | 95mm |
| To be recessed in insulation: | Yes, recessed in insulation |

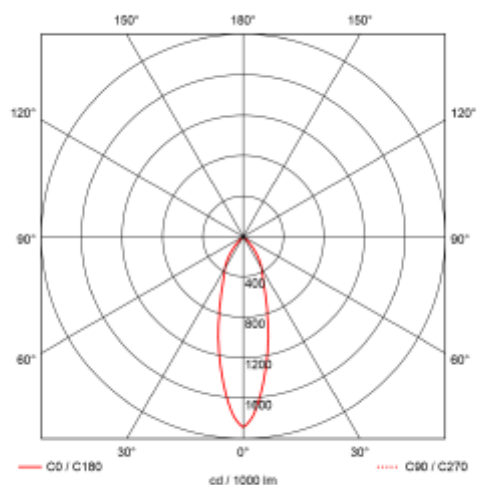

Tigrus Tilttable can be mounted directly in insulation. Tigrus has CRI>95 and is delivered with 2700K or Dim2Warm. The downlight can be tilted 25°. Easy to connect without using a screwdriver. Cut-out 76-83mm.