




PRODUCT SHEET

Exilis II dim

Art. no: 2510-2-01-3



Exilis II dim

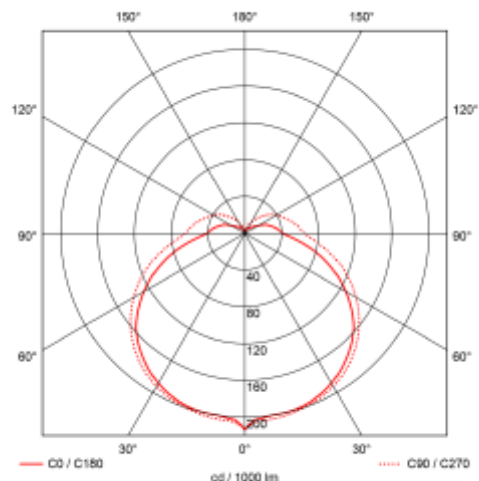

Our LED tube luminaire with a built in LED driver makes installation a breeze. The Exilis II comes in a variety of lengths that can be easily be connected together without the use of tools, just by clicking the LED tubes together. The different lengths makes it very easy to make a continuous line of light regardless of the length of the surface. The Exilis II comes with a opal diffuser and phasecut dim. Max 500W for each feed.



SPECIFICATIONS

| | |
|--------------------------|---------------------------|
| System Power [W]: | 10W |
| CCT (Color Temperature): | 3000K |
| CRI / Ra: | 80 |
| Lumen LED (tc=25): | 1100lm |
| Beam Angle: | 120° |
| Lens (Diffuser): | Opal |
| Dimming: | Phase-Cut |
| System Voltage [V]: | 230V 50Hz |
| Connection: | Exilis II 3-pin Connector |
| Lifetime [h]: | L80B10: 100 000h |
| Lumen/W: | 110lm/W |
| Color: | White |
| Length [mm]: | 572mm |
| Height [mm]: | 30mm |
| Width [mm]: | 22mm |