



## PRODUCT SHEET

Tigrus 360° Square


Art. no: 26927-D2W-36-3

# NORLUX®

Lighting Solutions

# Tigrus 360° Square


80-83mm

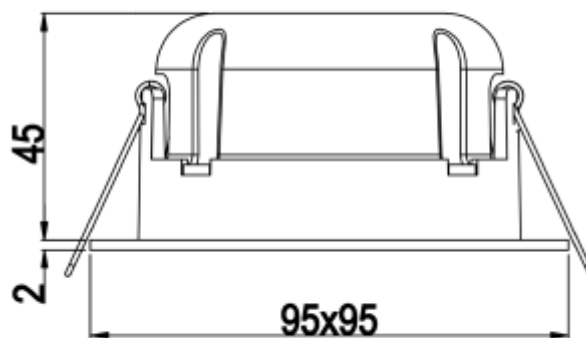

A

### SPECIFICATIONS

|                               |                             |
|-------------------------------|-----------------------------|
| System Power [W]:             | 8W                          |
| CCT (Color Temperature):      | 3000-1800K D2W              |
| CRI / Ra:                     | 95                          |
| Lumen Output:                 | 495lm                       |
| Lumen LED (tc=25):            | 550lm                       |
| Beam Angle:                   | 36°                         |
| Lens (Diffuser):              | Clear                       |
| Dimming:                      | Phase-Cut                   |
| Flickerfree:                  | Yes                         |
| System Voltage [V]:           | 230V 50Hz                   |
| Connection:                   | QuickConnect                |
| Mounting:                     | Recessed, Ceiling           |
| Cut-out [mm]:                 | Ø80-Ø83mm                   |
| Lumen/W:                      | 61lm/W                      |
| MacAdam (SDCM):               | 3                           |
| Color:                        | White                       |
| Length [mm]:                  | 95mm                        |
| Height [mm]:                  | 47mm                        |
| Width [mm]:                   | 95mm                        |
| To be recessed in insulation: | Yes, recessed in insulation |

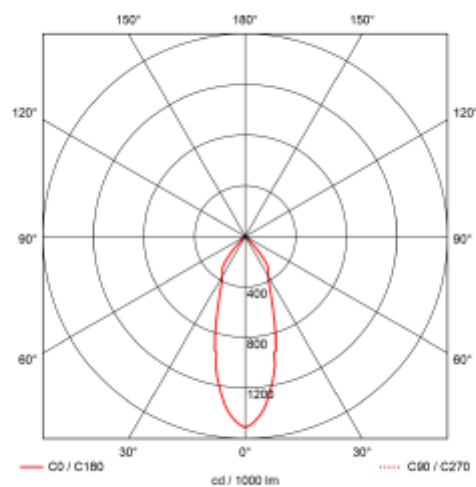

Tigrus 360° Square Rotatable can be mounted directly in insulation. Downlight have CRI>95 and are delivered with 2700K or Dim2Warm. The downlight can be tilted 25° and it's 360° rotatable. The luminaire connects easily without using a screwdriver. Cut-out 80-83mm