




## FDV SPEC SHEET


Ceto Fixed  
Art. no: 28830-TW-36-3-ddd



Ø 92mm

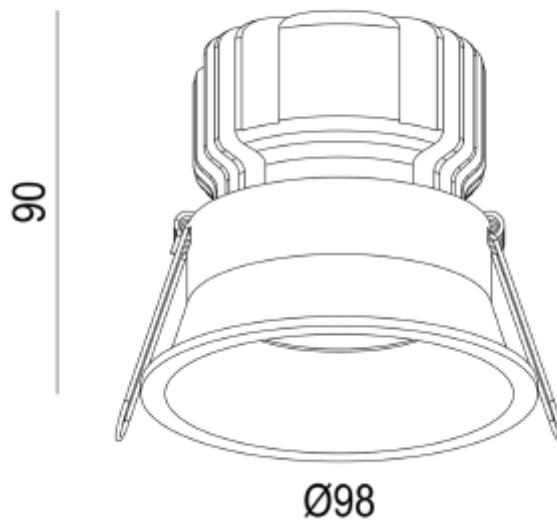

## Ceto Fixed



Art. no: 28830-TW-36-3-dd

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	900
Lumen LED (tc=25):	1428
Beam Angle:	36
CCT (Color Temperature):	6000-2700K TW
CRI / Ra:	80
Color Code:	827-860
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

### MOUNTING / CONNECTION

Connection:	18i3 Quick connection
Cut-out [mm]:	92mm
Mounting:	Recessed



## FDV SPEC SHEET

Ceto Fixed

Art. no: 28830-TW-36-3-ddd



PRODUCT		ELECTRICAL DATA	
To be recessed in insulation:	No	UGR (<=):	19
Ingress Protection:	IP44	Dimming:	DALI DT8
Impact Protection:	IK02	Dimming Output Type:	AM+PWM
Operating Temperature [°C]:	-20 - 45	Output Hz:	2000
Lifetime [h]:	L80: 100 000	Flickerfree:	Yes
Color:	White	Standby power Psb (W) <:	0,5
RAL:	RAL9010	Flicker metric (Pst LM) <:	1
Height [mm]:	90	Stroboscopic effect metric (SVM) <	0,4
Diameter [mm]:	98	System Power [W]:	15
Weight [kg]:	0,604166666666667	System Voltage [V]:	230V 50Hz
Housing Material :	Aluminium	Protection Class:	2
Diffuser Material:	Aluminium	Max load pr circuit - B10:	46
		Max load pr circuit - B16:	74
		Max load pr circuit - C10:	62
		Max load pr circuit - C16:	100
		Leakage current [mA]:	7
		Inrush current Imax [A]:	15
		Inrush current time [µs]:	100
		Socket / Cap-Base:	N/A
		Current Output [mA]:	350
		Voltage Forward Min [V]:	32
		Voltage Forward Max [V]:	36
		Emergency light [h]:	No Emergency light