




FDV SPEC SHEET

Sargas Rotatable


Art. no: 29927-36-2



93mm

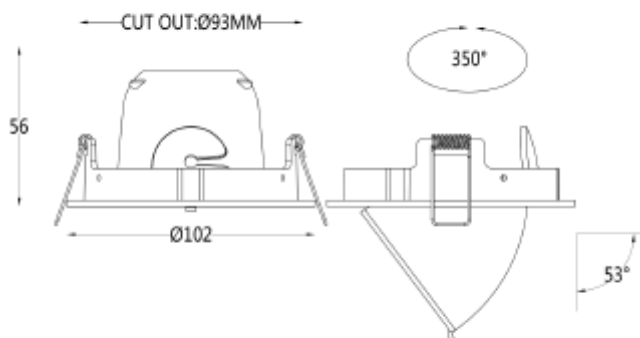

Sargas Rotatable



Art. no: 29927-36-2

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	600
Lumen LED (tc=25):	724
Beam Angle:	36
CCT (Color Temperature):	2700
CRI / Ra:	90
Color Code:	927
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

MOUNTING / CONNECTION

Connection:	QuickConnect
Cut-out [mm]:	93mm
Mounting:	Recessed



FDV SPEC SHEET

Sargas Rotatable

Art. no: 29927-36-2



PRODUCT		ELECTRICAL DATA	
To be recessed in insulation:	No	UGR (<=):	23
Ingress Protection:	IP20	Dimming:	Phase-Cut
Impact Protection:	IK02	Dimming Output Type:	Amplitude Modulation
Operating Temperature [°C]:	-20 - 45	Dimming Phasecut Type:	Leading / Trailing edge
Lifetime [h]:	L80: 100 000	Flickerfree:	Yes
Color:	Black	Standby power Psb (W) <:	0,5
RAL:	RAL9005	Flicker metric (Pst LM) <:	1
Height [mm]:	56	Stroboscopic effect metric (SVM) <	0,4
Width [mm]:	100	System Power [W]:	8
Diameter [mm]:	102	System Voltage [V]:	230V 50Hz
Weight [kg]:	0,3611111111111111	Protection Class:	2
Housing Material :	Aluminium	Max load pr circuit - B10:	140
Diffuser Material:	Aluminium	Max load pr circuit - B16:	224
Material 2:	Polycarbonate	Max load pr circuit - C10:	280
		Max load pr circuit - C16:	448
		Leakage current [mA]:	5
		Inrush current Imax [A]:	5
		Inrush current time [µs]:	100
		Socket / Cap-Base:	N/A
		Current Output [mA]:	180
		Voltage Forward Min [V]:	12
		Voltage Forward Max [V]:	17,5
		Emergency light [h]:	No Emergency light