



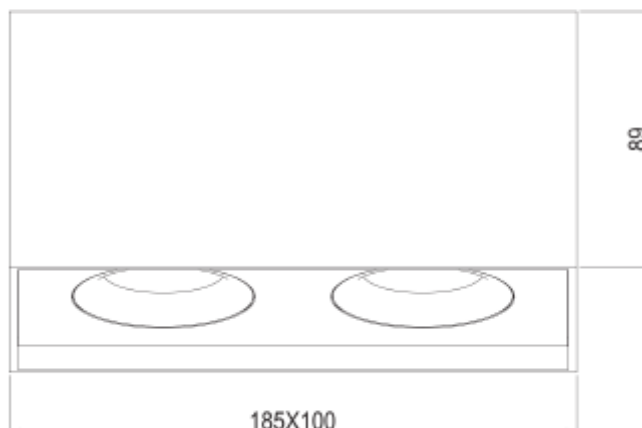

## FDV SPEC SHEET

Tigrus 360° Surface Double  
Art. no: 31927-D2W-36-2



# Tigrus 360° Surface Double



Art. no: 31927-D2W-36-2

### LIGHT TECHNICAL

|                          |                |
|--------------------------|----------------|
| Lightsource Type:        | LED (built in) |
| Lumen LED (tc=25):       | 1000           |
| Beam Angle:              | 36°            |
| CCT (Color Temperature): | 3000-1800K D2W |
| CRI / Ra:                | 95             |
| MacAdam (SDCM):          | 3              |
| Lens (Diffuser):         | Clear          |

### MOUNTING / CONNECTION

|             |                  |
|-------------|------------------|
| Connection: | QuickConnect     |
| Mounting:   | Ceiling, Surface |

### PRODUCT

|                               |                             |
|-------------------------------|-----------------------------|
| To be recessed in insulation: | Yes, recessed in insulation |
| Ingress Protection:           | IP20                        |
| Impact Protection:            | IK02                        |
| Color:                        | Black                       |
| Length [mm]:                  | 185                         |
| Height [mm]:                  | 89                          |
| Width [mm]:                   | 100                         |
| Housing Material :            | Aluminium                   |

### ELECTRICAL DATA

|                          |           |
|--------------------------|-----------|
| Dimming:                 | Phase-Cut |
| Flickerfree:             | Yes       |
| System Power [W]:        | 16        |
| System Voltage [V]:      | 230V 50Hz |
| Protection Class:        | 2         |
| Socket / Cap-Base:       | N/A       |
| Voltage Forward Min [V]: | 15,5      |
| Voltage Forward Max [V]: | 18,5      |