




FDV SPEC SHEET

Phoenix

Art. no: 3450-140-2-ddd

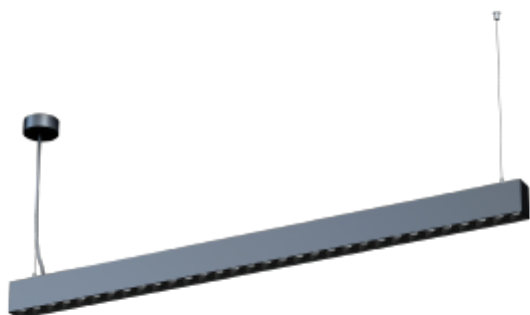

Phoenix



Art. no: 3450-140-2-ddd

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	6600
Lumen LED (tc=25):	6000
Beam Angle:	140° / 80°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
UGR (<=):	10

MOUNTING / CONNECTION

Connection:	Cable 3m
Mounting:	Pendant, Ceiling

ELECTRICAL DATA

Dimming:	DALI
Dimming Output Type:	Amplitude Modulation
Flickerfree:	Yes
Flicker metric (Pst LM) <:	0,002
Stroboscopic effect metric (SVM) <	0,005
System Power [W]:	60
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	20
Max load pr circuit - B16:	32
Max load pr circuit - C10:	20
Max load pr circuit - C16:	32
Leakage current [mA]:	0,7
Inrush current I _{max} [A]:	8,54
Inrush current time [μs]:	214
Socket / Cap-Base:	N/A



FDV SPEC SHEET

Phoenix

Art. no: 3450-140-2-ddd



PRODUCT

Ingress Protection:	IP20
Impact Protection:	IK06
Operating Temperature [°C]:	-20 - 45
Lifetime [h]:	L80B10: 100 000
Color:	Black
Length [mm]:	1285
Height [mm]:	76
Width [mm]:	48
Weight [kg]:	3,65