




## FDV SPEC SHEET

Tania Mini Basic

Art. no: 3561-3-18-3



51mm

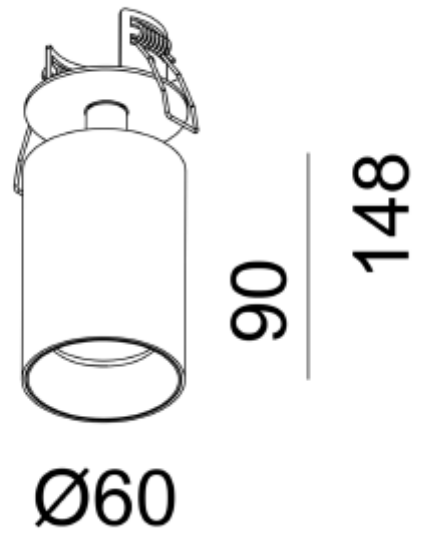

# Tania Mini Basic



Art. no: 3561-3-18-3

### LIGHT TECHNICAL

|                          |                |
|--------------------------|----------------|
| Lightsource Type:        | LED (built in) |
| Lumen Output:            | 1050           |
| Lumen LED (tc=25):       | 1450           |
| Beam Angle:              | 18°            |
| CCT (Color Temperature): | 2700           |
| CRI / Ra:                | 90             |
| Color Code:              | 927            |
| Lens (Diffuser):         | Clear          |

### MOUNTING / CONNECTION

|               |                   |
|---------------|-------------------|
| Connection:   | Terminal          |
| Cut-out [mm]: | Ø51               |
| Mounting:     | Recessed, Ceiling |

### PRODUCT

|                               |                 |
|-------------------------------|-----------------|
| To be recessed in insulation: | Not applicable  |
| Ingress Protection:           | IP20            |
| Operating Temperature [°C]:   | -20 - 40        |
| Lifetime [h]:                 | L80B10: 100 000 |
| Color:                        | White           |
| Length [mm]:                  | 90              |
| Diameter [mm]:                | 60              |

### ELECTRICAL DATA

|                                    |                         |
|------------------------------------|-------------------------|
| Dimming:                           | Phase-Cut               |
| Dimming Phasecut Type:             | Leading / Trailing edge |
| Flickerfree:                       | Yes                     |
| Flicker metric (Pst LM) <:         | 1                       |
| Stroboscopic effect metric (SVM) < | 0,4                     |
| System Power [W]:                  | 14,5                    |
| System Voltage [V]:                | 230V 50Hz               |
| Protection Class:                  | 1                       |
| Max load pr circuit - C10:         | 125                     |
| Max load pr circuit - C16:         | 200                     |
| Inrush current time [µs]:          | 100                     |
| Current Output [mA]:               | 350                     |