




## FDV SPEC SHEET

T-Line

Art. no: 5030-90-2

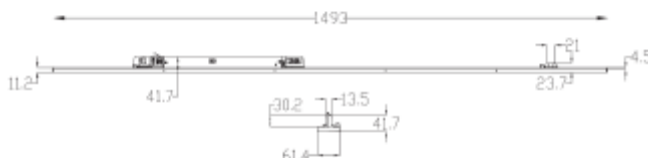

## T-Line



A++

Art. no: 5030-90-2

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	7734
Lumen LED (tc=25):	7800
Beam Angle:	90°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	Lens

### MOUNTING / CONNECTION

Connection:	Track 3-Circuit
Mounting:	Track

### ELECTRICAL DATA

Dimming:	None
System Power [W]:	35-50
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	24
Max load pr circuit - B16:	30
Max load pr circuit - C10:	24
Max load pr circuit - C16:	38
Leakage current [mA]:	0,25
Inrush current I <sub>max</sub> [A]:	20
Inrush current time [μs]:	136



## FDV SPEC SHEET

T-Line

Art. no: 5030-90-2



PRODUCT	
Ingress Protection:	IP20
Operating Temperature [°C]:	-25 - 60
Lifetime [h]:	L80B10: 100 000
Color:	Black
RAL:	RAL9017
Length [mm]:	1493
Height [mm]:	11
Width [mm]:	61,4
Weight [kg]:	1,32