




FDV SPEC SHEET

Force Plus

Art. no: 6950-09-2-ddd

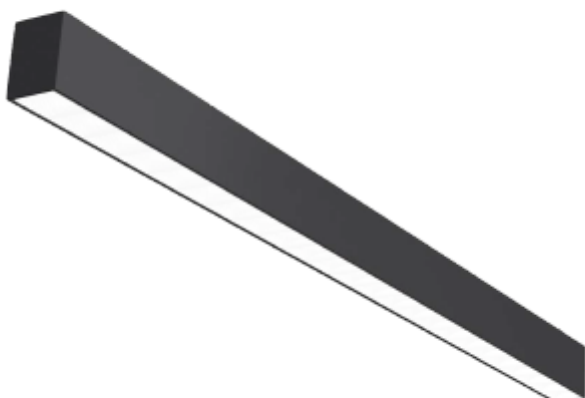

Force Plus



Art. no: 6950-09-2-ddd

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 1600 |
| Lumen LED (tc=25): | 2500 |
| Beam Angle: | 110° |
| CCT (Color Temperature): | 3000 |
| CRI / Ra: | 82 |
| Color Code: | 830 |
| MacAdam (SDCM): | 5 |
| Lens (Diffuser): | PC Opal |
| UGR (<=): | 27 |

MOUNTING / CONNECTION

| | |
|-----------------------|------------------------------------|
| Connection: | Cable 0.5m |
| Through-wiring (mm2): | 3x1,5 |
| Mounting: | Recessed, Pendant, Ceiling, Surfac |

ELECTRICAL DATA

| | |
|--------------------------|-----------|
| Dimming: | DALI2 |
| System Power [W]: | 15W |
| Preset Power [W]: | 15W |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 1 |
| Socket / Cap-Base: | N/A |
| Current Output [mA]: | 500 |
| Voltage Forward Min [V]: | 2,9 |
| Voltage Forward Max [V]: | 3 |



FDV SPEC SHEET

Force Plus

Art. no: 6950-09-2-ddd



| PRODUCT | |
|---------------------|-----------------|
| Ingress Protection: | IP20 |
| Impact Protection: | IK04 |
| Lifetime [h]: | L80B10: 100 000 |
| Color: | Black |
| RAL: | RAL7021 |
| Length [mm]: | 502,5 |
| Height [mm]: | 64,8 |
| Width [mm]: | 47 |
| Weight [kg]: | 0,65 |
| Housing Material : | Aluminium 6063 |
| Diffuser Material: | Polycarbonate |