



FDV SPEC SHEET


Auriga

Art. no: 736-2-40-1

NORLUX®

Lighting Solutions

176mm

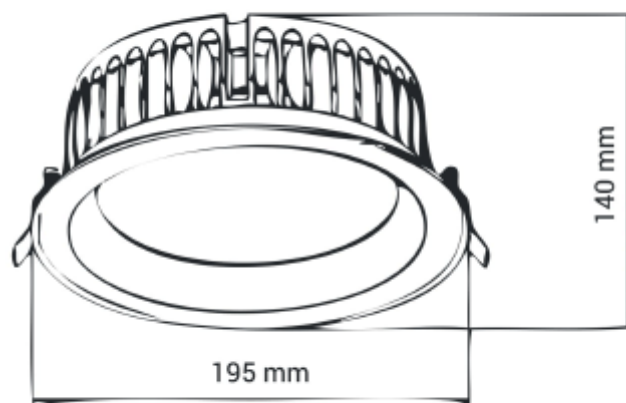

Auriga



A⁺

Art. no: 736-2-40-1

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	2150
Lumen LED (tc=25):	2300
Beam Angle:	40°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
Lens (Diffuser):	Clear

MOUNTING / CONNECTION

Connection:	Cable 2m
Cut-out [mm]:	Ø176
Mounting:	Recessed

PRODUCT

To be recessed in insulation:	No
Ingress Protection:	IP44
Impact Protection:	IK05
Operating Temperature [°C]:	35 -
Lifetime [h]:	L80B10: 100 000
Color:	Grey
Height [mm]:	140

ELECTRICAL DATA

Dimming:	None
System Power [W]:	20
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	31
Max load pr circuit - B16:	50
Max load pr circuit - C10:	52
Max load pr circuit - C16:	85
Inrush current I _{max} [A]:	5
Inrush current time [µs]:	50
Socket / Cap-Base:	N/A
Current Output [mA]:	500