




## FDV SPEC SHEET

Antlia C

Art. no: 746-40-2-ddd

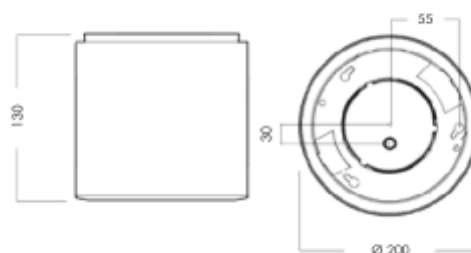

# Antlia C



A++

Art. no: 746-40-2-ddd

### LIGHT TECHNICAL

|                          |                |
|--------------------------|----------------|
| Lightsource Type:        | LED (built in) |
| Lumen Output:            | 2450           |
| Lumen LED (tc=25):       | 2550           |
| Beam Angle:              | 40°            |
| CCT (Color Temperature): | 3000           |
| CRI / Ra:                | 80             |
| Color Code:              | 830            |
| Lens (Diffuser):         | Opal           |

### MOUNTING / CONNECTION

|             |                  |
|-------------|------------------|
| Connection: | QuickConnect     |
| Mounting:   | Ceiling, Surface |

### PRODUCT

|                               |                |
|-------------------------------|----------------|
| To be recessed in insulation: | Not applicable |
| Ingress Protection:           | IP44           |
| Impact Protection:            | IK04           |
| Operating Temperature [°C]:   | 0 - 35         |
| Lifetime [h]:                 | L80B50: 50 000 |
| Color:                        | Black          |
| Height [mm]:                  | 130            |
| Width [mm]:                   | 200            |

### ELECTRICAL DATA

|                     |           |
|---------------------|-----------|
| Dimming:            | DALI      |
| System Power [W]:   | 23        |
| System Voltage [V]: | 230V 50Hz |
| Protection Class:   | 1         |
| Socket / Cap-Base:  | N/A       |