



## PRODUCT SHEET


Pavo P

Art. no: 8017646

# NORLUX®

Lighting Solutions

## Pavo P

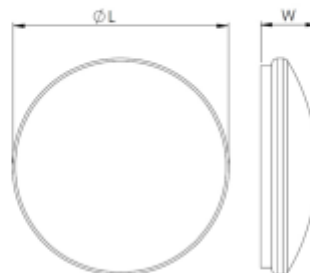


L, mm	W, mm	A, mm	B, mm	C, mm
280	95	135	87	77.5
360	105	196	104	123
410	115	239	157	149.5
500	140	317	191.5	124.5



A+

### SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	22W
CCT (Color Temperature):	3000K
CRI / Ra:	80
Lumen Output:	2090lm
Lumen LED (tc=25):	2090lm
Beam Angle:	118
Lens (Diffuser):	Opal
Dimming:	None
System Voltage [V]:	230V 50Hz
Connection:	Terminal
Mounting:	Ceiling, Surface, Wall
Lifetime [h]:	L70B50: 40 000h
Lumen/W:	95lm/W
UGR (<=):	22
MacAdam (SDCM):	5
Color:	White
Length [mm]:	410mm
Height [mm]:	115mm
Width [mm]:	410mm
Weight [kg]:	0,9kg
Emergency light [h]:	3 hours
Emergency light testing:	Selftest

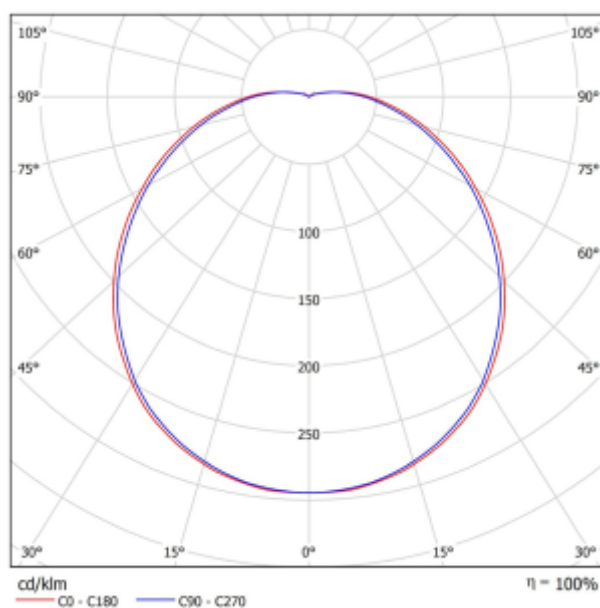

Surface mounted LED plafond with direct light distribution. Opal PMMA diffuser and steel housing. UGR index: =22. IP44. IK02. 3 hours emergency with Selftest.