



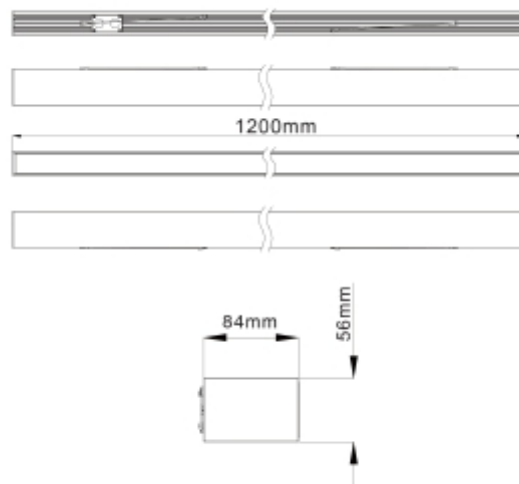

FDV SPEC SHEET

Ledline

Art. no: 805002-3-ddd

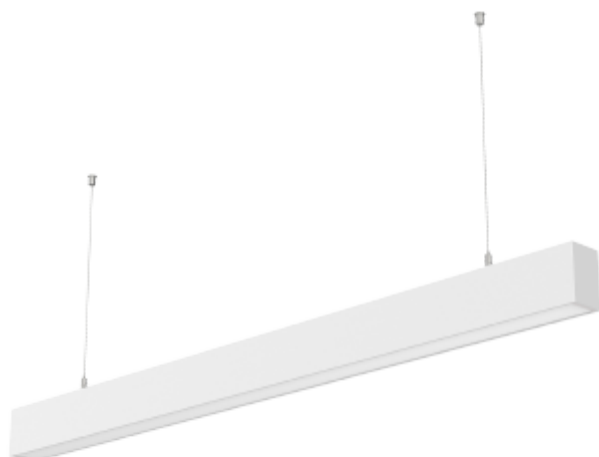

Ledline



Art. no: 805002-3-ddd

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	3650
Lumen LED (tc=25):	4400
Beam Angle:	110
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	Opal
UGR (<=):	27

MOUNTING / CONNECTION

Connection:	LEDLine 5-pin
Mounting:	Recessed, Pendant, Ceiling, Surfac

ELECTRICAL DATA

Dimming:	DALI
Dimming Output Type:	Amplitude Modulation
Flickerfree:	Yes
Flicker metric (Pst LM) <:	0
Stroboscopic effect metric (SVM) <	0,004
System Power [W]:	40
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	33
Max load pr circuit - B16:	53
Max load pr circuit - C10:	33
Max load pr circuit - C16:	53
Leakage current [mA]:	0,25
Inrush current I _{max} [A]:	3,75
Inrush current time [μs]:	190
Socket / Cap-Base:	N/A
Current Output [mA]:	450
Voltage Forward Min [V]:	32
Voltage Forward Max [V]:	48



FDV SPEC SHEET

Ledline

Art. no: 805002-3-ddd



PRODUCT

Ingress Protection:	IP40
Impact Protection:	IK08
Lifetime [h]:	L70B50: 50 000
Color:	White
Length [mm]:	1200
Height [mm]:	84
Width [mm]:	56
Weight [kg]:	3,24