




## FDV SPEC SHEET

Trunk

Art. no: CFL-2-1550-30WD-08-3



Unit: mm

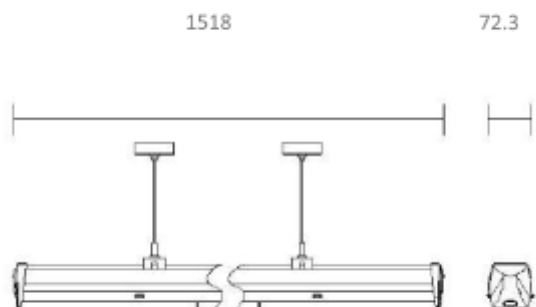

## Trunk



A++

Art. no: CFL-2-1550-30WD-0

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	8583
Lumen LED (tc=25):	9400
Beam Angle:	90°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
Lens (Diffuser):	Clear

### MOUNTING / CONNECTION

Connection:	Trunk 8-wires
Mounting:	Suspended, Ceiling

### ELECTRICAL DATA

Dimming:	None
Output Hz:	80000
Flickerfree:	Yes
Standby power Psb (W) <:	50
Flicker metric (Pst LM) <:	0,0285
Stroboscopic effect metric (SVM) <	0,004
System Power [W]:	50/43/36/29
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	11
Max load pr circuit - B16:	18
Max load pr circuit - C10:	18
Max load pr circuit - C16:	29
Inrush current Imax [A]:	23
Inrush current time [µs]:	242
Current Output [mA]:	350



## FDV SPEC SHEET

Trunk

Art. no: CFL-2-1550-30WD-08-3



PRODUCT	
Ingress Protection:	IP20
Lifetime [h]:	L80B10: 100 000
Color:	White
RAL:	RAL9016
Length [mm]:	1500
Height [mm]:	78,6
Width [mm]:	72,3
Weight [kg]:	1,64