




PRODUCT SHEET

Icarus 500lm 927 36° 7W BK phasecut Isosafe 8-pack
Art. no: 101975-36-2

NORLUX®


Lighting Solutions

Icarus 500lm 927 36° 7W BK phasecut Isosafe 8-pack

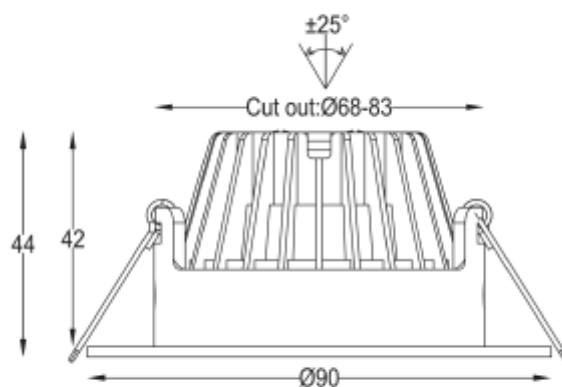

SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	7W
CCT (Color Temperature):	2700K
CRI / Ra:	95
Lumen Output:	450lm
Lumen LED (tc=25):	600lm
Beam Angle:	36
Lens (Diffuser):	Clear
Dimming:	Phase-Cut
Flickerfree:	Yes
System Voltage [V]:	230V 50Hz
Connection:	QuickConnect
Mounting:	Recessed
Cut-out [mm]:	68-83mmmm
Lifetime [h]:	L80: 100 000h
Lumen/W:	64lm/W
UGR (<=):	28
MacAdam (SDCM):	3
Color:	Black
Height [mm]:	44mm
Diameter [mm]:	90mm
Weight [kg]:	2,725kg
Emergency light [h]:	No Emergency light
To be recessed in insulation:	Yes, recessed in insulation

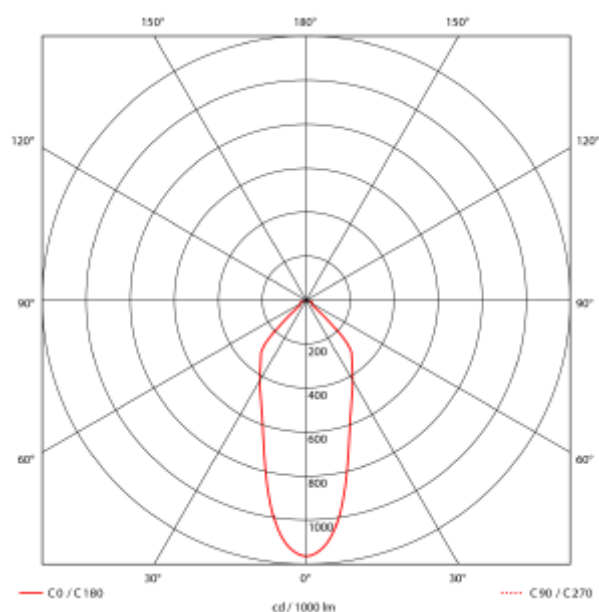

7W downlight that can be installed directly into insulation. Cutout Ø68-83mm makes it perfect for rehab and new installation. Tilttable 25°, CRI>95 and flickerfree phasecut driver. 8-pack with driver for each downlighth.