





FDV SPEC SHEET
Rod Midi C
Art. no: 102310-30-1-ddd

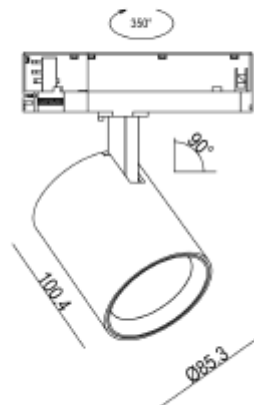

Rod Midi C



Art. no: 102310-30-1-ddd

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	2990
Lumen LED (tc=25):	4100
Beam Angle:	30
CCT (Color Temperature):	3000
CRI / Ra:	90
Color Code:	930
MacAdam (SDCM):	3
Lens (Diffuser):	Clear
UGR (<=):	19

MOUNTING / CONNECTION

Connection:	Track 3-Circuit
Mounting:	Track, Ceiling



FDV SPEC SHEET

Rod Midi C
Art. no: 102310-30-1-ddd



PRODUCT	
Ingress Protection:	IP20
Impact Protection:	IK02
Operating Temperature [°C]:	-20 - 45
Lifetime [h]:	L80: 100 000
Color:	Grey
RAL:	RAL7035
Height [mm]:	115
Diameter [mm]:	97
Weight [kg]:	0,7
Housing Material :	Aluminium
Diffuser Material:	Aluminium
Material 2:	Polycarbonate

ELECTRICAL DATA	
Dimming:	DALI2
Flickerfree:	Yes
Standby power Psb (W) <:	0,5
Flicker metric (Pst LM) <:	0,015
Stroboscopic effect metric (SVM) <	0,004
System Power [W]:	23
System Voltage [V]:	230V 50Hz
Dimming Output Type:	Amplitude Modulation
Protection Class:	2
Max load pr circuit - B10:	38
Max load pr circuit - B16:	62
Max load pr circuit - C10:	38
Max load pr circuit - C16:	62
Leakage current [mA]:	0,26
Inrush current Imax [A]:	1,86
Inrush current time [µs]:	68
Socket / Cap-Base:	N/A
Current Output [mA]:	600
Voltage Forward Min [V]:	33
Voltage Forward Max [V]:	38
Emergency light [h]:	No Emergency light