




FDV SPEC SHEET

Rod Mini C

Art. no: 102531-20-2

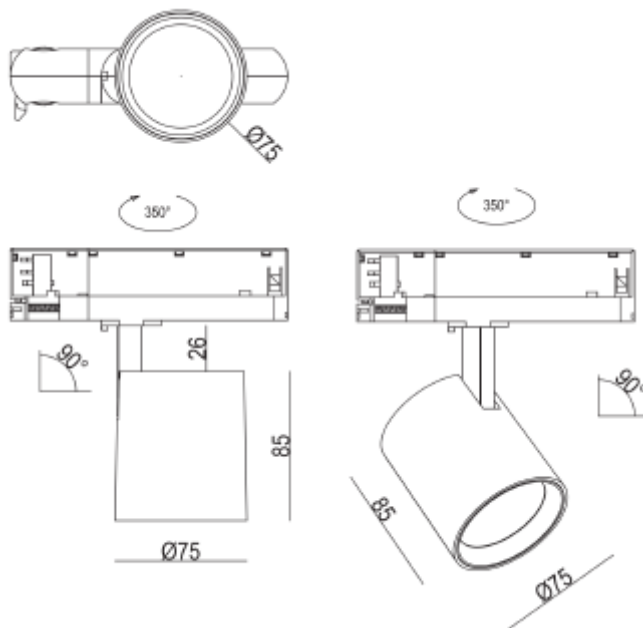

Rod Mini C



Art. no: 102531-20-2

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	1800
Lumen LED (tc=25):	2189
Beam Angle:	20
CCT (Color Temperature):	3000
CRI / Ra:	90
Color Code:	930
MacAdam (SDCM):	3
Lens (Diffuser):	Clear
UGR (<=):	19

MOUNTING / CONNECTION

Connection:	Track 3-Circuit
Cut-out [mm]:	/
Mounting:	Track, Ceiling



FDV SPEC SHEET

Rod Mini C

Art. no: 102531-20-2



PRODUCT		ELECTRICAL DATA	
Ingress Protection:	IP20	Dimming:	None
Impact Protection:	IK02	Flickerfree:	Yes
Operating Temperature [°C]:	-20 - 45	Standby power Psb (W) <:	0,5
Lifetime [h]:	L80: 100 000	Flicker metric (Pst LM) <:	0,037
Color:	Black	Stroboscopic effect metric (SVM) <	0,009
RAL:	RAL9005	System Power [W]:	15
Height [mm]:	85	System Voltage [V]:	230V 50Hz
Width [mm]:	75	Protection Class:	2
Diameter [mm]:	75	Max load pr circuit - B10:	56
Weight [kg]:	0,53	Max load pr circuit - B16:	89
Housing Material :	Aluminium	Max load pr circuit - C10:	56
Diffuser Material:	Aluminium	Max load pr circuit - C16:	89
		Leakage current [mA]:	0,55
		Inrush current Imax [A]:	2,025
		Inrush current time [µs]:	70
		Socket / Cap-Base:	N/A
		Current Output [mA]:	350
		Voltage Forward Min [V]:	33
		Voltage Forward Max [V]:	38
		Emergency light [h]:	No Emergency light