




FDV SPEC SHEET

Rod Mini C

Art. no: 102531-36-3

NORLUX®

Lighting Solutions

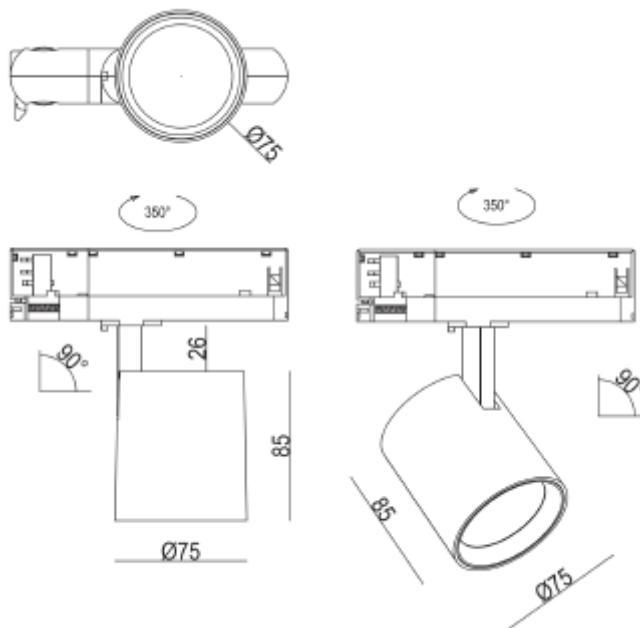

Rod Mini C



Art. no: 102531-36-3

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 1800 |
| Lumen LED (tc=25): | 2189 |
| Beam Angle: | 36 |
| CCT (Color Temperature): | 3000 |
| CRI / Ra: | 90 |
| Color Code: | 930 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | Clear |
| UGR (<=): | 19 |

MOUNTING / CONNECTION

| | |
|---------------|-----------------|
| Connection: | Track 3-Circuit |
| Cut-out [mm]: | / |
| Mounting: | Track, Ceiling |



FDV SPEC SHEET

Rod Mini C

Art. no: 102531-36-3



| PRODUCT | |
|-----------------------------|--------------------|
| Ingress Protection: | IP20 |
| Impact Protection: | IK02 |
| Operating Temperature [°C]: | -20 - 45 |
| Lifetime [h]: | L80: 100 000 |
| Color: | White |
| RAL: | RAL9010 |
| Height [mm]: | 85 |
| Width [mm]: | 75 |
| Diameter [mm]: | 75 |
| Weight [kg]: | 0,5333333333333333 |
| Housing Material : | Aluminium |
| Diffuser Material: | Aluminium |

| ELECTRICAL DATA | |
|------------------------------------|--------------------|
| Dimming: | None |
| Flickerfree: | Yes |
| Standby power Psb (W) <: | 0,5 |
| Flicker metric (Pst LM) <: | 0,037 |
| Stroboscopic effect metric (SVM) < | 0,009 |
| System Power [W]: | 15 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 2 |
| Max load pr circuit - B10: | 56 |
| Max load pr circuit - B16: | 89 |
| Max load pr circuit - C10: | 56 |
| Max load pr circuit - C16: | 89 |
| Leakage current [mA]: | 0,55 |
| Inrush current Imax [A]: | 2,025 |
| Inrush current time [µs]: | 70 |
| Socket / Cap-Base: | N/A |
| Current Output [mA]: | 350 |
| Voltage Forward Min [V]: | 33 |
| Voltage Forward Max [V]: | 38 |
| Emergency light [h]: | No Emergency light |