




FDV SPEC SHEET

Cilla Mini

Art. no: 102721-30-2

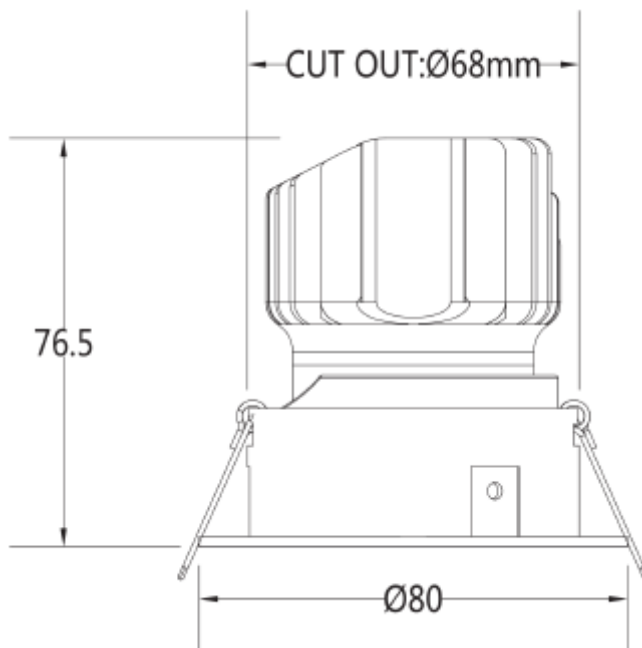

Cilla Mini



Art. no: 102721-30-2

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	670
Lumen LED (tc=25):	1100
Beam Angle:	30
CCT (Color Temperature):	3000
CRI / Ra:	90
Color Code:	930
MacAdam (SDCM):	3
Lens (Diffuser):	Lens

MOUNTING / CONNECTION

Connection:	QuickConnect
Cut-out [mm]:	68mm
Mounting:	Recessed



FDV SPEC SHEET

Cilla Mini

Art. no: 102721-30-2



PRODUCT		ELECTRICAL DATA	
To be recessed in insulation:	Yes, recessed in insulation	UGR (<=):	19
Ingress Protection:	IP44	Dimming:	Depending on Driver
Impact Protection:	IK02	Dimming Output Type:	PWM
Operating Temperature [°C]:	-20 - 45	Output Hz:	90000
Lifetime [h]:	L80: 100 000	Dimming Phasecut Type:	Leading / Trailing edge
Color:	Black	Flickerfree:	Yes
RAL:	RAL9005	Standby power Psb (W) <:	1
Length [mm]:	80	Flicker metric (Pst LM) <:	1
Height [mm]:	76,5	Stroboscopic effect metric (SVM) <	0,4
Width [mm]:	80	System Power [W]:	7
Diameter [mm]:	80	System Voltage [V]:	230V 50Hz
Weight [kg]:	0,2361111111111111	Protection Class:	3
Housing Material :	Aluminium	Max load pr circuit - B16:	56
Diffuser Material:	Aluminium	Max load pr circuit - C16:	118
Material 2:	Srpings	Leakage current [mA]:	5
		Inrush current time [µs]:	100
		Socket / Cap-Base:	N/A
		Current Output [mA]:	150
		Voltage Forward Min [V]:	33
		Voltage Forward Max [V]:	38
		Emergency light [h]:	No Emergency light