




## FDV SPEC SHEET

Halo Pendant Dimbar

Art. no: 1127-2-120-2

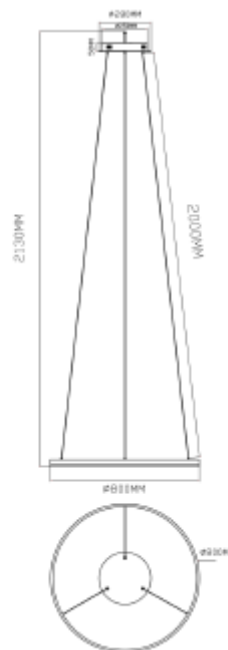

# Halo Pendant Dimbar



Art. no: 1127-2-120-2

### LIGHT TECHNICAL

|                          |                |
|--------------------------|----------------|
| Lightsource Type:        | LED (built in) |
| Lumen Output:            | 1400           |
| Lumen LED (tc=25):       | 3200           |
| Beam Angle:              | 120            |
| CCT (Color Temperature): | 3000           |
| CRI / Ra:                | 80             |
| Color Code:              | 830            |
| MacAdam (SDCM):          | 6              |
| Lens (Diffuser):         | Frosted        |
| UGR (<=):                | 16             |

### MOUNTING / CONNECTION

|             |                       |
|-------------|-----------------------|
| Connection: | 18i3 Quick connection |
| Mounting:   | Pendant, Ceiling      |

### ELECTRICAL DATA

|                                      |                         |
|--------------------------------------|-------------------------|
| Dimming:                             | Phase-Cut               |
| Dimming Output Type:                 | Amplitude Modulation    |
| Dimming Phasecut Type:               | Leading / Trailing edge |
| Flicker metric (Pst LM) <:           | 1                       |
| Stroboscopic effect metric (SVM) <   | 0,4                     |
| System Power [W]:                    | 28                      |
| System Voltage [V]:                  | 230V 50Hz               |
| Protection Class:                    | 2                       |
| Max load pr circuit - B10:           | 52                      |
| Max load pr circuit - B16:           | 84                      |
| Max load pr circuit - C10:           | 52                      |
| Max load pr circuit - C16:           | 84                      |
| Leakage current [mA]:                | 7                       |
| Inrush current I <sub>max</sub> [A]: | 5                       |
| Inrush current time [μs]:            | 100                     |
| Voltage Forward Min [V]:             | 2,6                     |
| Voltage Forward Max [V]:             | 3,4                     |



## FDV SPEC SHEET

Halo Pendant Dimbar

Art. no: 1127-2-120-2



| PRODUCT                     |                |
|-----------------------------|----------------|
| Ingress Protection:         | IP20           |
| Operating Temperature [°C]: | -20 - 45       |
| Lifetime [h]:               | L80B10: 50.000 |
| Color:                      | Black          |
| Length [mm]:                | 800            |
| Height [mm]:                | 34             |
| Width [mm]:                 | 800            |
| Weight [kg]:                | 3              |