



## PRODUCT SHEET

Tigrus 360° Rotatable



Art. no: 25927-D2W-36-2

# NORLUX®

Lighting Solutions

## Tigrus 360° Rotatable


80-83mm

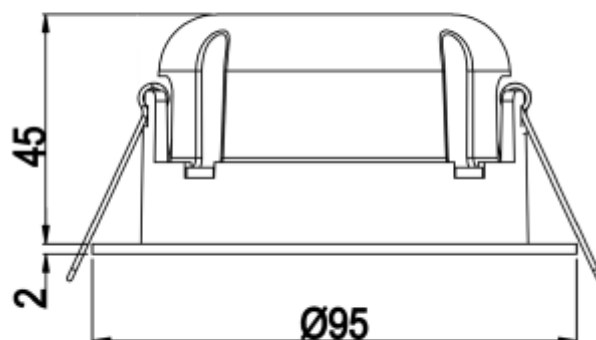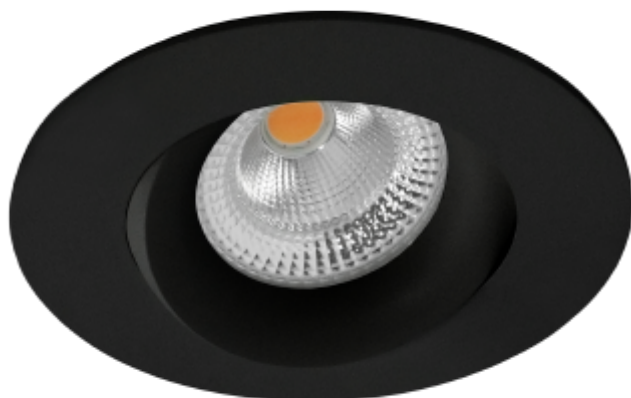

A

### SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	8W
CCT (Color Temperature):	1800-3000K TW
Preset CCT (Color Temperature):	1800-3000K TWK
CRI / Ra:	95
Lumen Output:	500lm
Lumen LED (tc=25):	684lm
Beam Angle:	36
Lens (Diffuser):	Clear
Dimming:	Phase-Cut
Flickerfree:	Yes
System Voltage [V]:	230V 50Hz
Connection:	QuickConnect
Mounting:	Recessed
Cut-out [mm]:	80-83mmmm
Lifetime [h]:	L80: 100 000h
Lumen/W:	63lm/W
UGR (<=):	23
MacAdam (SDCM):	3
Color:	Black
Length [mm]:	47mm
Height [mm]:	47mm
Width [mm]:	95mm
Diameter [mm]:	95mm
Weight [kg]:	0,394444444444444kg
Emergency light [h]:	No Emergency light
To be recessed in insulation:	Yes, recessed in insulation

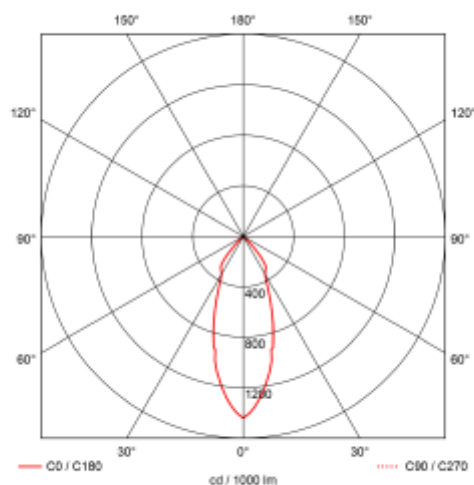

Tigrus 360° Rotatable can be mounted directly in insulation. Downlight have CRI>95 and are delivered with 2700K or Dim2Warm. The downlight can be tilted 25° and it's 360° rotatable. The luminaire connects easily without using a screwdriver. Cut-out 80-83mm.