



PRODUCT SHEET



Benu Office DALI

Art. no: 3733-110-3-ddd

NORLUX®


Lighting Solutions

Benu Office DALI

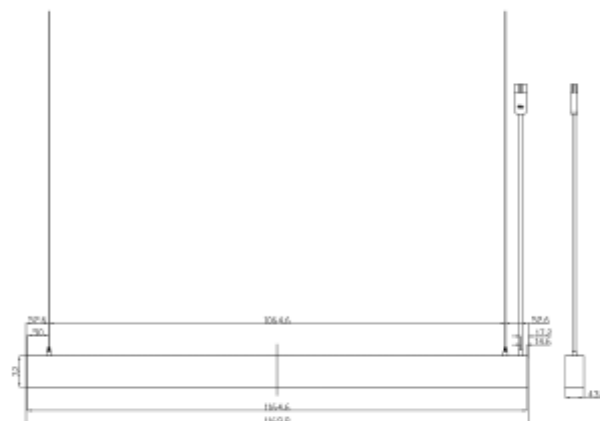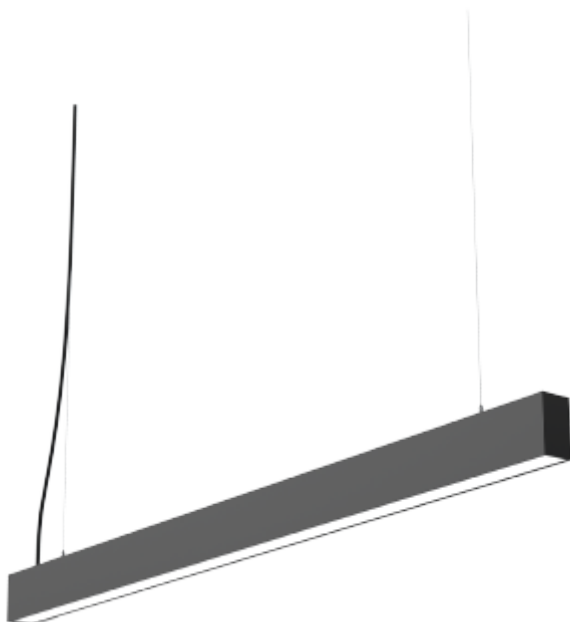

SPECIFICATIONS

| | |
|--------------------------|-----------------------------|
| Lightsource Type: | LED (built in) |
| System Power [W]: | 50W |
| CCT (Color Temperature): | 4000K |
| CRI / Ra: | 90 |
| Lumen Output: | 5400lm |
| Lumen LED (tc=25): | 7000lm |
| Beam Angle: | 110° / 75° |
| Lens (Diffuser): | Micropris. |
| Dimming: | DALI2 |
| Flickerfree: | Yes |
| System Voltage [V]: | 230V 50Hz |
| Connection: | 18i5 Quick connection |
| Mounting: | Suspended, Pendant, Ceiling |
| Lifetime [h]: | L80: 100 000h |
| Lumen/W: | 108lm/W |
| UGR (<=): | 19 |
| MacAdam (SDCM): | 3 |
| Color: | White |
| Length [mm]: | 1170mm |
| Height [mm]: | 72mm |
| Width [mm]: | 44mm |
| Weight [kg]: | 2,5kg |

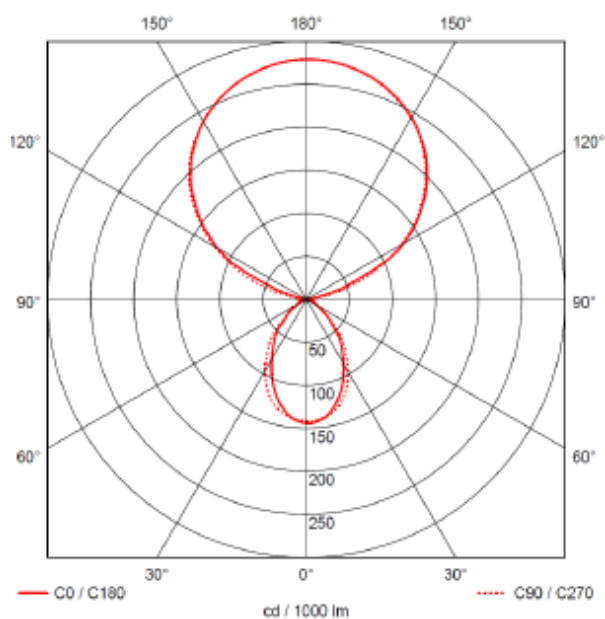

Benu is a linear LED luminaire with up- and down light for pending down in indoor areas. UGR19 and DALI2. 18i5 connection, 1500mm transparent wire and T-profile bracket are included.