



PRODUCT SHEET

Izar

Art. no: 3932-01-2-ddd

NORLUX®

Lighting Solutions


Izar



B

SPECIFICATIONS

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| System Power [W]: | 48W |
| CCT (Color Temperature): | 3000K |
| CRI / Ra: | 80 |
| Lumen Output: | 5600lm |
| Lumen LED (tc=25): | 6500lm |
| Beam Angle: | 90° |
| Lens (Diffuser): | Micropris. |
| Dimming: | DALI2 |
| Flickerfree: | Yes |
| System Voltage [V]: | 230V 50Hz |
| Connection: | QuickConnect |
| Lifetime [h]: | L80: 100 000h |
| Lumen/W: | 117lm/W |
| UGR (<=): | 19 |
| MacAdam (SDCM): | 3 |
| Color: | White |
| Height [mm]: | 82mm |
| Width [mm]: | 600mm |
| Diameter [mm]: | 600mm |
| Weight [kg]: | 6,1kg |

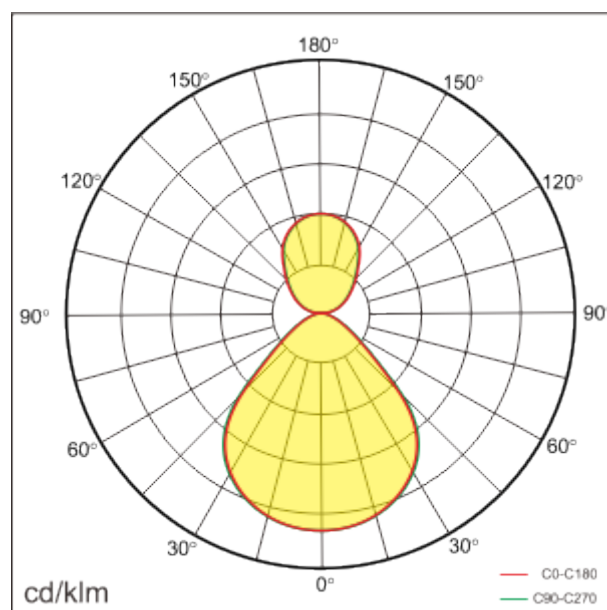

Izar is our uncompromising surface-mounted classic LED luminaire that beautifully combines up and downwards light distribution. The excellent aluminium craftsmanship gives the installation an appearance with rich texture and a slight hint of luxury. Also the mounting patent will be noticed for smart savings in installation time. The special PC anti-glare cover secures the installation a pleasant UGR18. Casambi bluetooth control can be installed. Wire or pendant pole mounting kit can be ordered separately.