



PRODUCT SHEET

Cold 5



Art. no: 1117-30-3

NORLUX®

Lighting Solutions

Cold 5

130x36mm

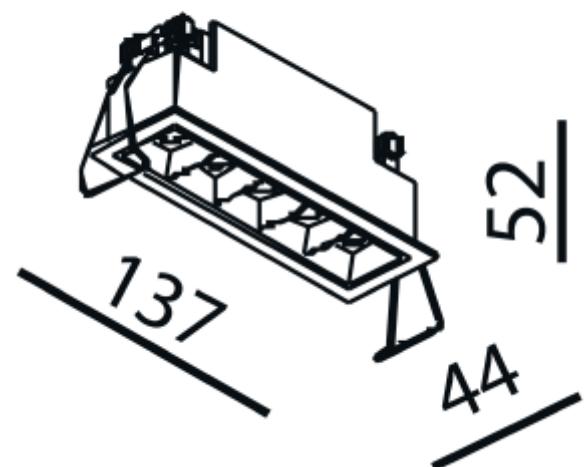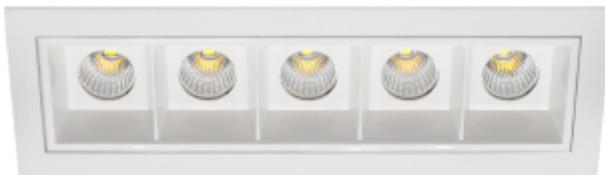

Cold white are delivered with white front ring. See accessories for optional front rings that can be bought separately, and correct choice of driver

CE IP20 230V 50Hz

SPECIFICATIONS

| | |
|-------------------------------|---------------------|
| Lightsource Type: | LED (built in) |
| System Power [W]: | 10W |
| CCT (Color Temperature): | 2700K |
| CRI / Ra: | 90 |
| Lumen Output: | 882lm |
| Lumen LED (tc=25): | 1050lm |
| Beam Angle: | 30° |
| Lens (Diffuser): | None |
| Dimming: | Depending on Driver |
| System Voltage [V]: | 230V 50Hz |
| Connection: | Depending on driver |
| Mounting: | Recessed, Ceiling |
| Cut-out [mm]: | 130x36mm |
| Lifetime [h]: | L80B10: 100 000h |
| Lumen/W: | 83lm/W |
| UGR (<=): | 13 |
| MacAdam (SDCM): | 2 |
| Color: | White |
| Length [mm]: | 137mm |
| Height [mm]: | 52mm |
| Width [mm]: | 44mm |
| Weight [kg]: | 0,32kg |
| To be recessed in insulation: | No |