



PRODUCT SHEET

Cold 5

Art. no: 1118-30-3


NORLUX®

Lighting Solutions

Cold 5



130x36mm

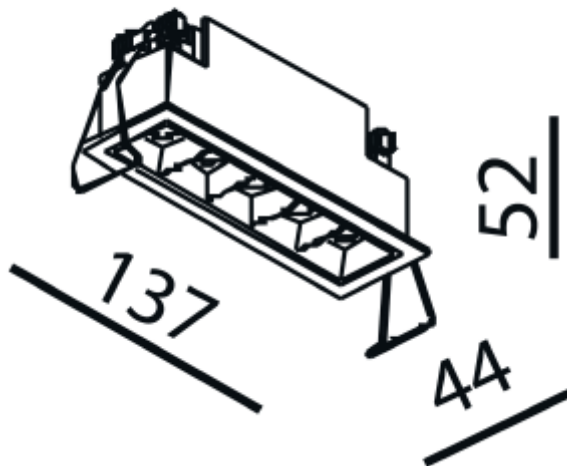

With its rectangular and recessed light source, Cold downlight has a unique design that is suitable for most rooms. Front ring is available in several different colors and can easily be replaced. Driver is not included. Please see accessories for recommended driver and alternative colors for front ring.



A++

SPECIFICATIONS

| | |
|-------------------------------|---------------------|
| Lightsource Type: | LED (built in) |
| System Power [W]: | 10W |
| CCT (Color Temperature): | 4000K |
| CRI / Ra: | 90 |
| Lumen Output: | 805lm |
| Lumen LED (tc=25): | 1100lm |
| Beam Angle: | 30° |
| Lens (Diffuser): | None |
| Dimming: | Depending on Driver |
| System Voltage [V]: | 230V 50Hz |
| Connection: | Depending on driver |
| Mounting: | Recessed, Ceiling |
| Cut-out [mm]: | Ø130x36mm |
| Lifetime [h]: | L80B10: 100 000h |
| MacAdam (SDCM): | 2 |
| Color: | White |
| Length [mm]: | 137mm |
| Height [mm]: | 52mm |
| Width [mm]: | 44mm |
| Weight [kg]: | 0,32kg |
| To be recessed in insulation: | No |