




## FDV SPEC SHEET

Ceto Mini Fixed  
Art. no: 21930-36-2

# NORLUX®

Lighting Solutions

83mm

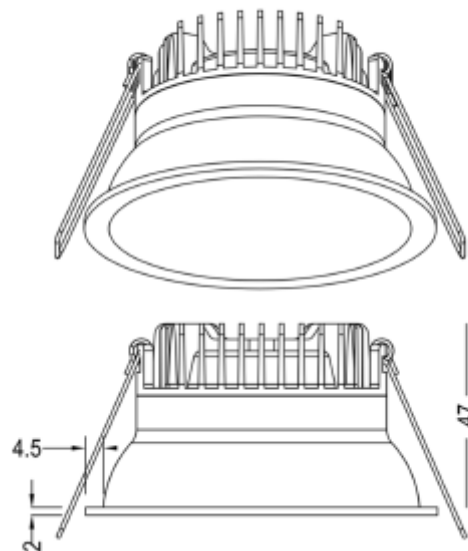

## Ceto Mini Fixed



A<sup>+</sup>

Art. no: 21930-36-2

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	540
Lumen LED (tc=25):	624
Beam Angle:	36
CCT (Color Temperature):	3000
CRI / Ra:	95
Color Code:	930
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

### MOUNTING / CONNECTION

Connection:	QuickConnect
Cut-out [mm]:	83mm
Mounting:	Recessed, Ceiling



## FDV SPEC SHEET

Ceto Mini Fixed  
Art. no: 21930-36-2



PRODUCT		ELECTRICAL DATA	
To be recessed in insulation:	Yes, recessed in insulation	UGR (<=):	19
Ingress Protection:	IP44	Dimming:	Phase-Cut
Impact Protection:	IK02	Dimming Output Type:	Amplitude Modulation
Operating Temperature [°C]:	-20 - 45	Dimming Phasecut Type:	Leading / Trailing edge
Lifetime [h]:	L80: 100 000	Flickerfree:	Yes
Color:	Black	Standby power Psb (W) <:	1
RAL:	RAL9005	Flicker metric (Pst LM) <:	1
Height [mm]:	47	Stroboscopic effect metric (SVM) <	0,4
Width [mm]:	90	System Power [W]:	7
Diameter [mm]:	90	System Voltage [V]:	230V 50Hz
Weight [kg]:	0,338888888888889	Protection Class:	2
Housing Material :	Aluminium	Max load pr circuit - B16:	182
Diffuser Material:	Aluminium	Max load pr circuit - C10:	280
Material 2:	Polycarbonate	Max load pr circuit - C16:	448
		Leakage current [mA]:	5
		Inrush current Imax [A]:	5
		Inrush current time [µs]:	100
		Socket / Cap-Base:	N/A
		Current Output [mA]:	350
		Voltage Forward Min [V]:	12
		Voltage Forward Max [V]:	17,5
		Emergency light [h]:	No Emergency light