




FDV SPEC SHEET

Ceto Fixed

Art. no: 28930-TW-36-3-ddd



Ø 92mm

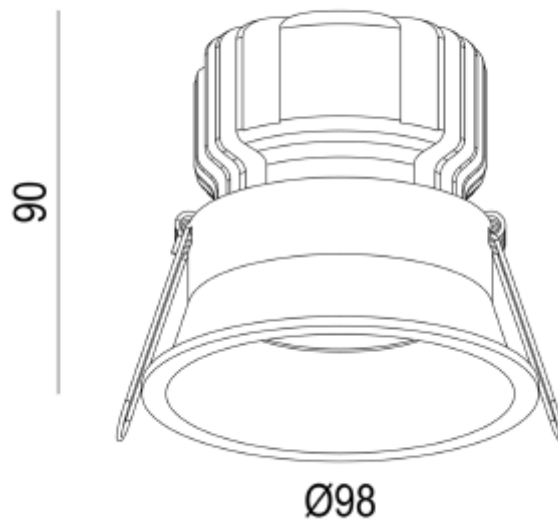

Ceto Fixed



Art. no: 28930-TW-36-3-dd

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	900
Lumen LED (tc=25):	1428
Beam Angle:	36
CCT (Color Temperature):	6000-2700K TW
CRI / Ra:	90
Color Code:	960-927
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

MOUNTING / CONNECTION

Connection:	18i3 Quick connection
Cut-out [mm]:	92mm
Mounting:	Recessed



FDV SPEC SHEET

Ceto Fixed

Art. no: 28930-TW-36-3-ddd



PRODUCT	
To be recessed in insulation:	No
Ingress Protection:	IP44
Impact Protection:	IK02
Operating Temperature [°C]:	-20 - 45
Lifetime [h]:	L80: 100 000
Color:	White
RAL:	RAL9010
Height [mm]:	90
Diameter [mm]:	98
Weight [kg]:	0,604166666666667
Housing Material :	Aluminium
Diffuser Material:	Aluminium

ELECTRICAL DATA	
UGR (<=):	19
Dimming:	DALI DT8
Dimming Output Type:	AM+PWM
Output Hz:	2000
Flickerfree:	Yes
Standby power Psb (W) <:	0,5
Flicker metric (Pst LM) <:	1
Stroboscopic effect metric (SVM) <	0,4
System Power [W]:	15
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	46
Max load pr circuit - B16:	74
Max load pr circuit - C10:	62
Max load pr circuit - C16:	100
Leakage current [mA]:	7
Inrush current Imax [A]:	15
Inrush current time [µs]:	100
Socket / Cap-Base:	N/A
Current Output [mA]:	350
Voltage Forward Min [V]:	32
Voltage Forward Max [V]:	36
Emergency light [h]:	No Emergency light