




## FDV SPEC SHEET

Tania Mini 3-Circuit  
Art. no: 3550-2-36-3-ddd

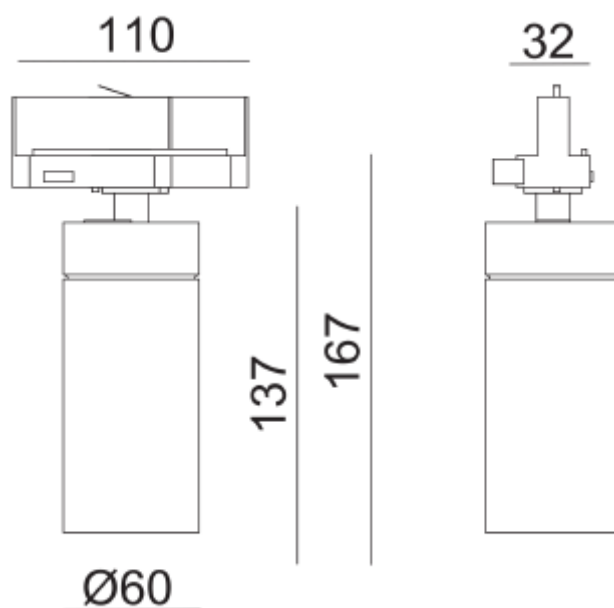

## Tania Mini 3-Circuit



Art. no: 3550-2-36-3-ddd

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	1400
Lumen LED (tc=25):	1550
Beam Angle:	36
CCT (Color Temperature):	3000
CRI / Ra:	90
Color Code:	930
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

### MOUNTING / CONNECTION

Connection:	Track 3-Circuit+dim
Mounting:	Track, Ceiling

### ELECTRICAL DATA

Dimming:	DALI2
Flickerfree:	Yes
System Power [W]:	14,5
System Voltage [V]:	230V 50Hz
Dimming Output Type:	Amplitude Modulation
Protection Class:	1
Max load pr circuit - B10:	38
Max load pr circuit - B16:	61
Max load pr circuit - C10:	38
Max load pr circuit - C16:	61
Inrush current I <sub>max</sub> [A]:	52
Inrush current time [μs]:	1
Current Output [mA]:	350



## FDV SPEC SHEET

Tania Mini 3-Circuit  
Art. no: 3550-2-36-3-ddd



PRODUCT	
Ingress Protection:	IP20
Operating Temperature [°C]:	-20 - 40
Lifetime [h]:	L80B10: 55 000
Color:	White
Length [mm]:	167
Diameter [mm]:	60
Weight [kg]:	0,5
Housing Material :	Aluminium