



PRODUCT SHEET


Silindir 70

Art. no: 101091-7-24-3-p

NORLUX®

Lighting Solutions

Silindir 70

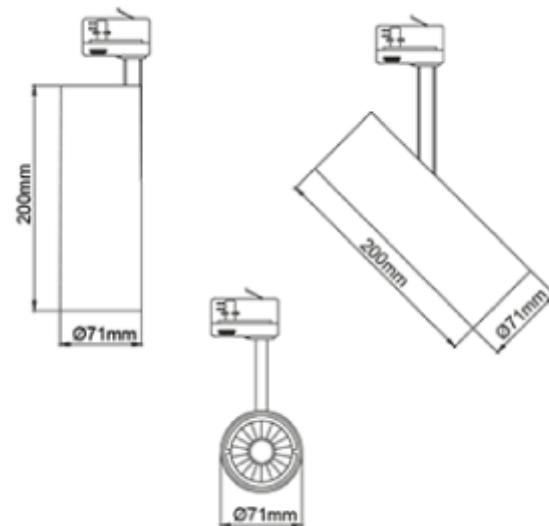

A+

The Silindir uses the possibilities created by new technology. The LED driver is mounted inside the luminaire body. This gives us a slim design combined with a powerful light output that can be easily adjusted in all directions to meet all needs. Cylinder can be tilted 90 degrees and rotated 350 degrees its own axis.

SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	24W
CCT (Color Temperature):	3000K
CRI / Ra:	90
Lumen Output:	2976lm
Lumen LED (tc=25):	2800lm
Beam Angle:	24°
Lens (Diffuser):	Clear
Dimming:	Phase-Cut
System Voltage [V]:	230V 50Hz
Connection:	Track 3-Circuit
Mounting:	Track, Ceiling
Lifetime [h]:	L80B10: 100 000h
MacAdam (SDCM):	3
Color:	White
Length [mm]:	71mm
Height [mm]:	215mm
Width [mm]:	71mm
Weight [kg]:	1kg