




FDV SPEC SHEET

Manna Double

Art. no: 101253-40-2

NORLUX®

Lighting Solutions

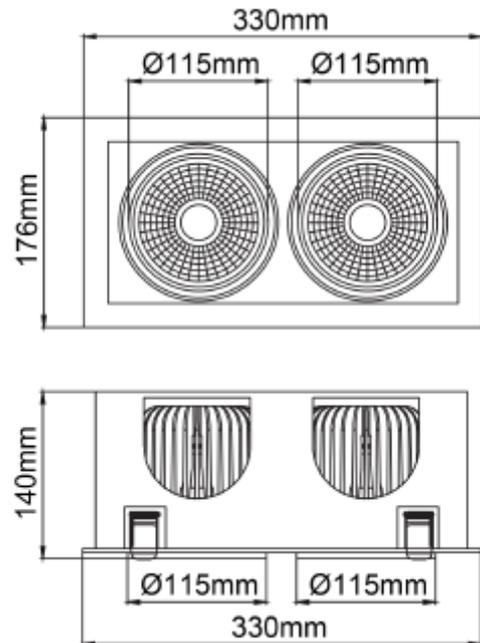

Manna Double



A⁺⁺

Art. no: 101253-40-2

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	2x4170
Lumen LED (tc=25):	2x4400
Beam Angle:	40°
CCT (Color Temperature):	3500
CRI / Ra:	90
Color Code:	935
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

MOUNTING / CONNECTION

Connection:	18i3x2
Cut-out [mm]:	310x160
Mounting:	Recessed

ELECTRICAL DATA

Dimming:	None
Flicker metric (Pst LM) <:	1
Stroboscopic effect metric (SVM) <:	0,4
System Power [W]:	2x35
System Voltage [V]:	230V 50Hz
Protection Class:	3
Max load pr circuit - B10:	8
Max load pr circuit - B16:	16
Max load pr circuit - C10:	16
Max load pr circuit - C16:	32
Inrush current I _{max} [A]:	25
Inrush current time [μs]:	250
Current Output [mA]:	900
Voltage Forward Min [V]:	30,6
Voltage Forward Max [V]:	39,2



FDV SPEC SHEET

Manna Double

Art. no: 101253-40-2



Lighting Solutions

PRODUCT

To be recessed in insulation:	No
Ingress Protection:	IP20
Operating Temperature [°C]:	-20 - 50
Lifetime [h]:	L80B10: 60 000
Color:	Black
RAL:	RAL9005
Length [mm]:	330
Height [mm]:	176
Width [mm]:	140