



## PRODUCT SHEET




Theros Lite

Art. no: 101740-01-1

# NORLUX®

Lighting Solutions

## Theros Lite

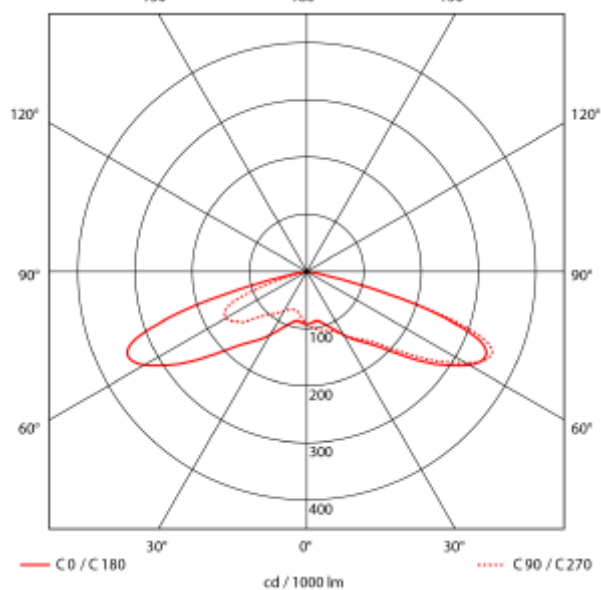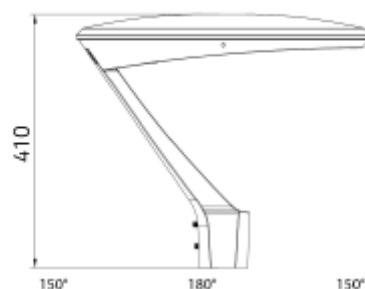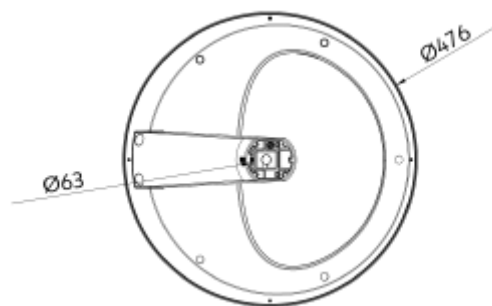

Modern and highly efficient post top luminaire for park and pathway. Theros Lite are IP66 and IK08 and available in 3000K or 4000K. Delivered with 5m cable, for Ø60mm mast.



A++

### SPECIFICATIONS

System Power [W]:	31W
CCT (Color Temperature):	3000K
CRI / Ra:	80
Lumen Output:	3472lm
Lumen LED (tc=25):	3813lm
Dimming:	None
System Voltage [V]:	230V 50Hz
Connection:	Cable 5m
Mounting:	Mast
Lifetime [h]:	L80B50: 100 000h
Color:	Grey
Height [mm]:	410mm
Diameter [mm]:	476mm
Weight [kg]:	7,1kg